



KLED
D-221S

/ 40W-75W /


Urban lighting

A Classic Residential Lighting
with Mediterranean style

D-221S

一组实用型高端LED路灯，有三种安装方式，分别功率从40W-75W，可适用于不同道路功能照明需求，多种光学系统可选配。

A practical high-end LED streeting, there are three installation methods, with power from 22W to 75W. It can be used for lighting requirements of different road functions. A variety of optical systems can be selected.

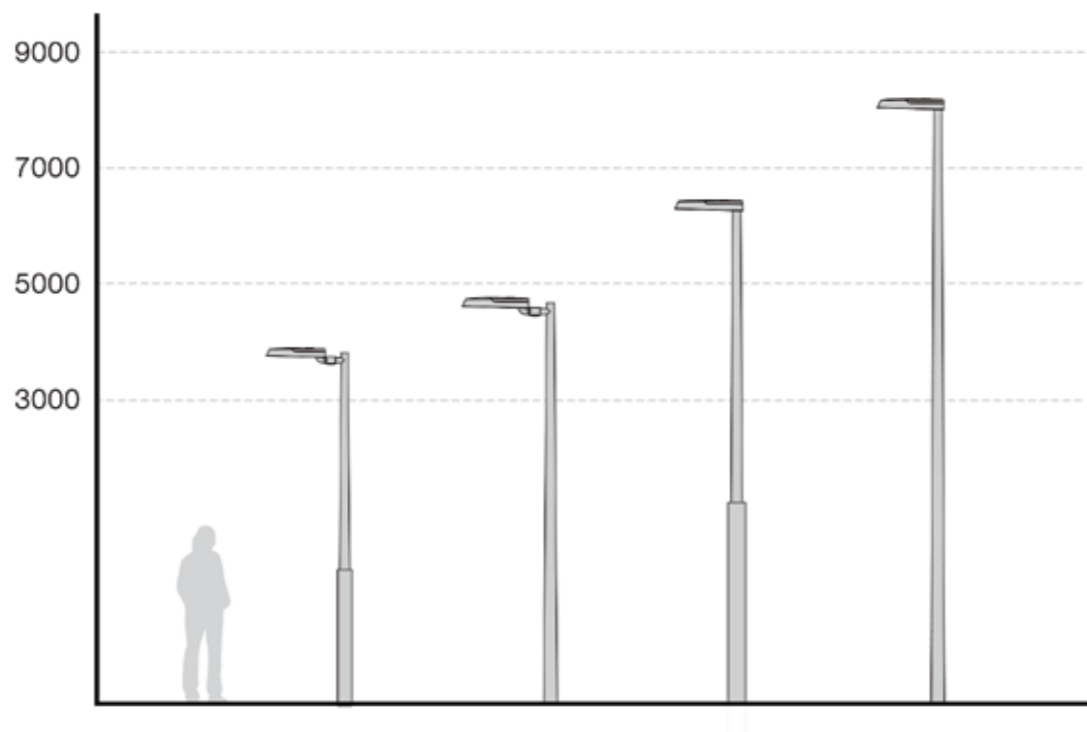

简述 Description

- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V/DALI/编程电源选择，20KV浪涌保护器
- 按钮式开启配置，打开无需工具
- 有竖装、横装和壁装三种安装方式，安装管径有Φ48/Φ60mm
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optical with PC lenses with high visual comfort and uniform lighting distribution, multiple optical distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surger protection up to 20KV.
- Tool-free replaceable with push-button for opened device.
- There are three installation modes: vertical installation, horizontal installation and wall installation, installation tube diameter Φ48/Φ60mm.
- Surface anti-ultraviolet pure polyester powder painting, corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008
- Street lighting control system for use with smart LEDs. It can be compatible with remote management system.
- All external screw are in 304 stainless steel.




IP66

IK08



应用透镜 Optical application

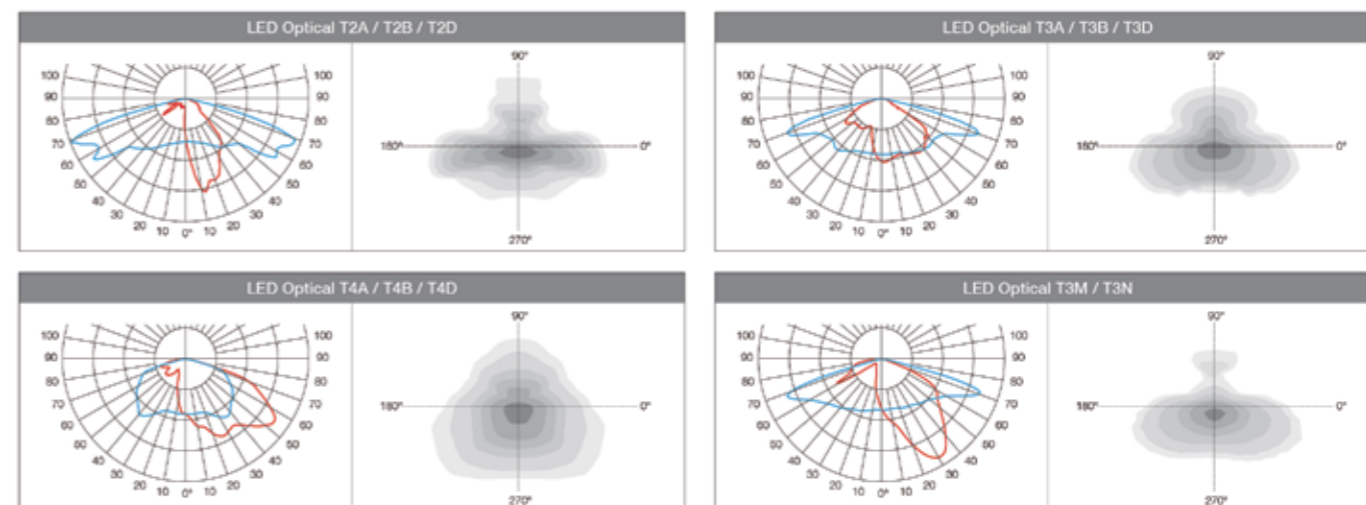

技术参数 Technology data



D-221S

| Code | Power | LED Qty | Optical | Pack Size | Weight | Pcs/20' | Pcs/40' |
|---------------------|-------|---------|---------------------|-------------|--------|---------|---------|
| LED chips-3535/5050 | | | | Body: | | | |
| D-221S1LED40-16 | 40W | 16 | T2A/T3A/T4A/T2M/T3M | 500*370*135 | 6.2 | 1170 | 2465 |
| D-221S1LED40-32 | 40W | 32 | T2A/T3A/T4A/T2M/T3M | 500*370*135 | 6.2 | 1170 | 2465 |
| D-221S1LED60-32 | 60W | 32 | T2A/T3A/T4A/T2M/T3M | 500*370*135 | 6.2 | 1170 | 2465 |
| D-221S1LED75-32 | 75W | 32 | T2A/T3A/T4A/T2M/T3M | 500*370*135 | 6.2 | 1170 | 2465 |



竖装 /Longitudinal installation/

灯具和灯杆只需一个步骤，即可完成安装，提高安装效率。

Lamps and poles can be installed in one step to improve installation efficiency.



横装 /Transverse installation/

横装设计，符合更多灯杆造型，给城市建设增添一道别样的风景。

The horizontal design conforms to the shape of more lamp poles and adds a different landscape to urban construction.



壁装 /Wall mounting/

一款在没有灯杆的情况下，也能安装的灯具，契合城市多种道路状况。

Lamps and poles can be installed in one step to improve installation efficiency.







— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928