




The photograph may not match the reference exactly. Please read the product description to identify the finish.

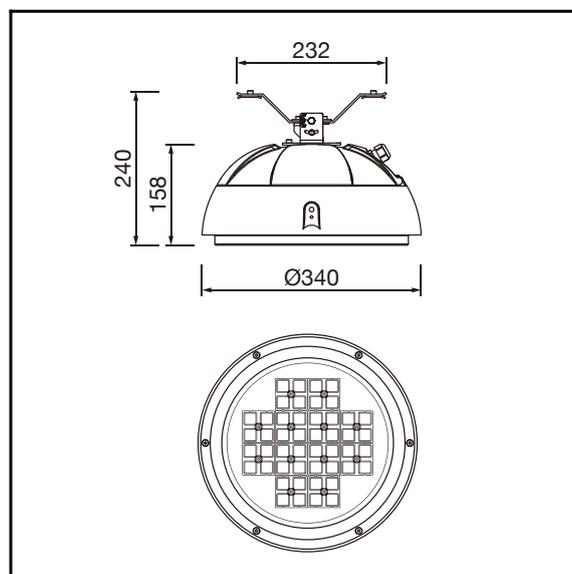

**D-202SS**

**TECHNICAL CHARACTERISTICS**



Product Model:	D-202SSLED80-36	D-202SSLED100-36	D-202SSLED120-36
IP Protection degrees:	IP66		
IK Protection degrees:	IK08		
Light source:	36 x LED CREE /36 x LUXEON 5050		48 x LED CREE / 48 x LUXEON 5050
Total power consumption:	80W	100W	120W
Luminous Flux:	8800*11200Lm	11000-14000Lm	13200-16800Lm
Luminous efficiency:	110-140Lm/w		
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available		
Voltage/Frequency:	100-240V/50-60Hz		
Warranty(Years):	5		
Units per box:	1		
Net Weight(Kg)	5.5	5.5	5.5
Aerodynamic resistance (CxS)	0.09		

**MATERIALS / FINISHES**

<b>Structure material:</b> High purity aluminium	<b>Aiffuser material:</b> Glass
<b>Structure finish:</b> Grey	<b>Diffuser finish:</b> Transparent


**GEAR**

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm<sup>(N)</sup>: Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


Kled reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.  
Please consult the sales team to clarify any doubt.

Tel.: +86 574 62566 890  
Email: info@kled.com.cn  
http://www.kled.com.cn/

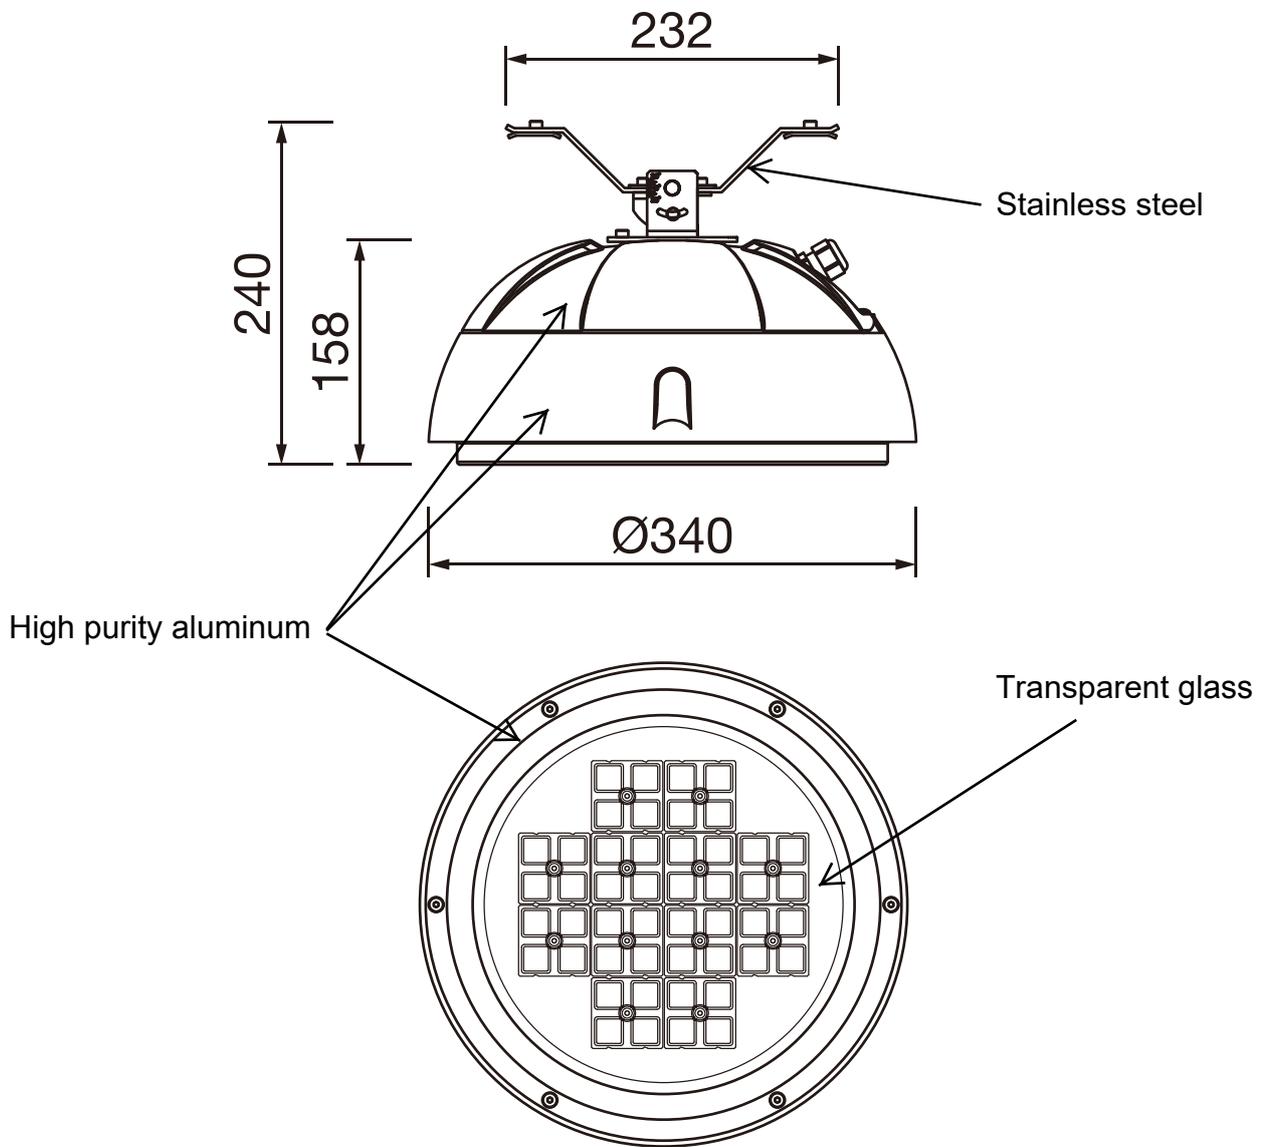


# OUTDOOR


1

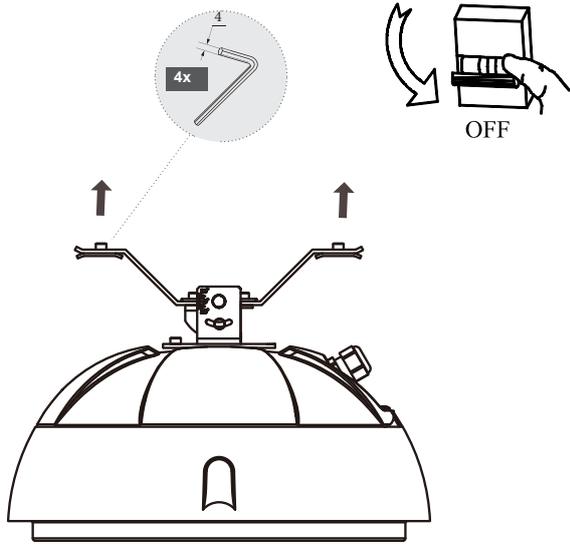


2

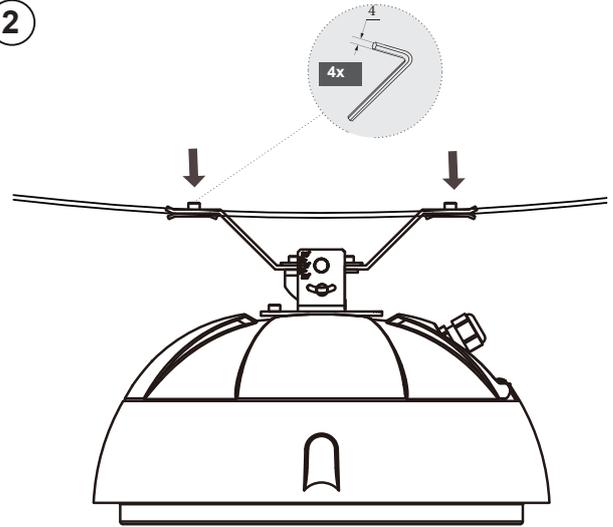


3

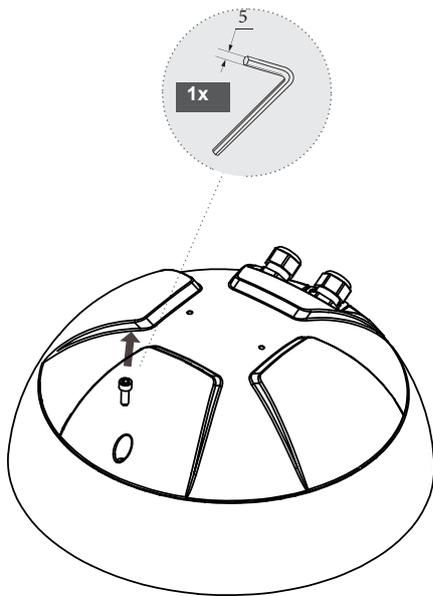

4

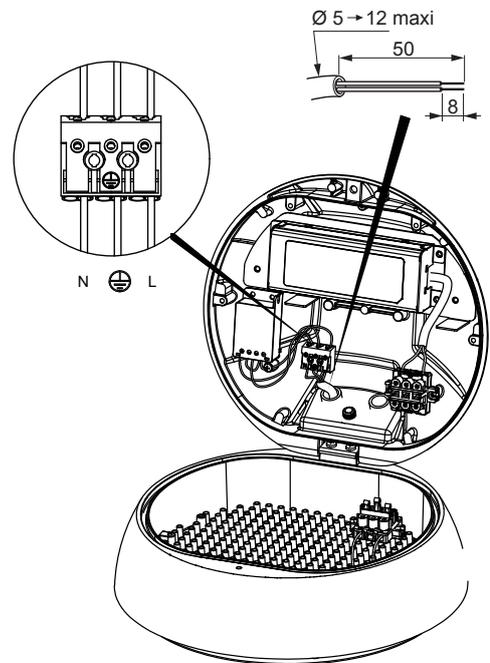

5

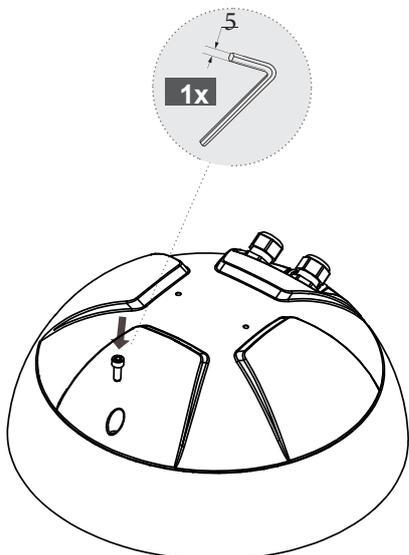

6

