

The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	T-21LLED30-16	T-21LLED40-24	T-21LLED60-24	T-21LLED80-32
IP Protection degrees:	IP66			
IK Protection degrees:	IK08			
Light source:	16 x LED CREE / 16 x LUXEON 5050	24 x LED CREE / 24 x LUXEON 5050	24 x LED CREE / 24x LUXEON 5050	32 x LED CREE / 32 x LUXEON 5050
Total power consumption:	30W	40W	60W	80W
Luminous Flux:	3300-3900Lm	4400-5200Lm	6600-7800Lm	8800-10400Lm
Luminous efficiency:	110-130Lm/w			
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available			
Voltage/Frequency:	110-240V/50-60Hz			
Warranty(Years):	5			
Units per box:	1			
Net Weight(Kg)	11.8	11.8	12	12
Aerodynamic resistance (CxS)	0.245			


MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent

GEAR


Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

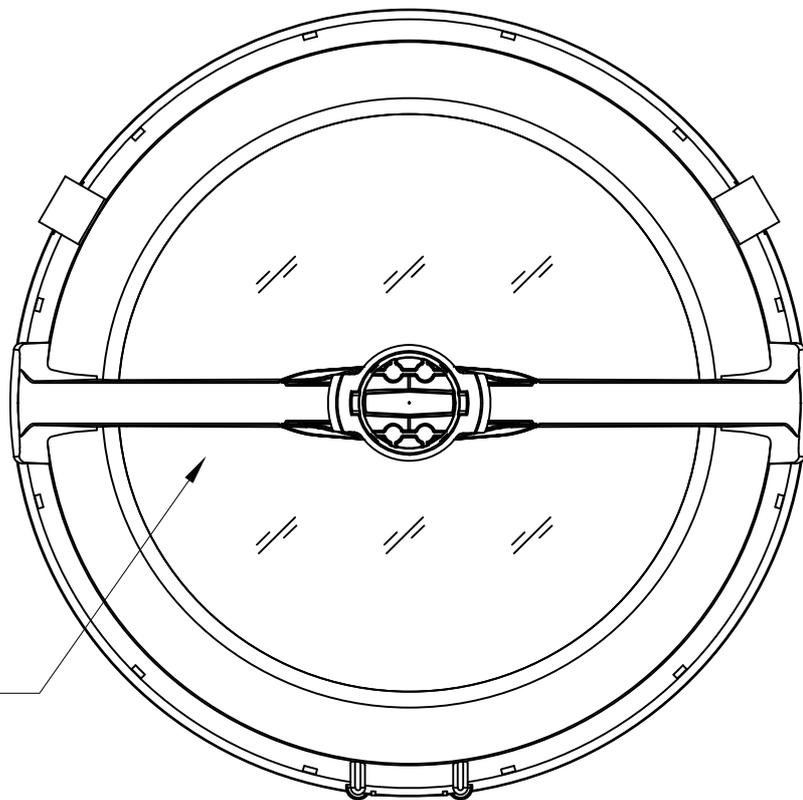

Glass

$\phi 530$

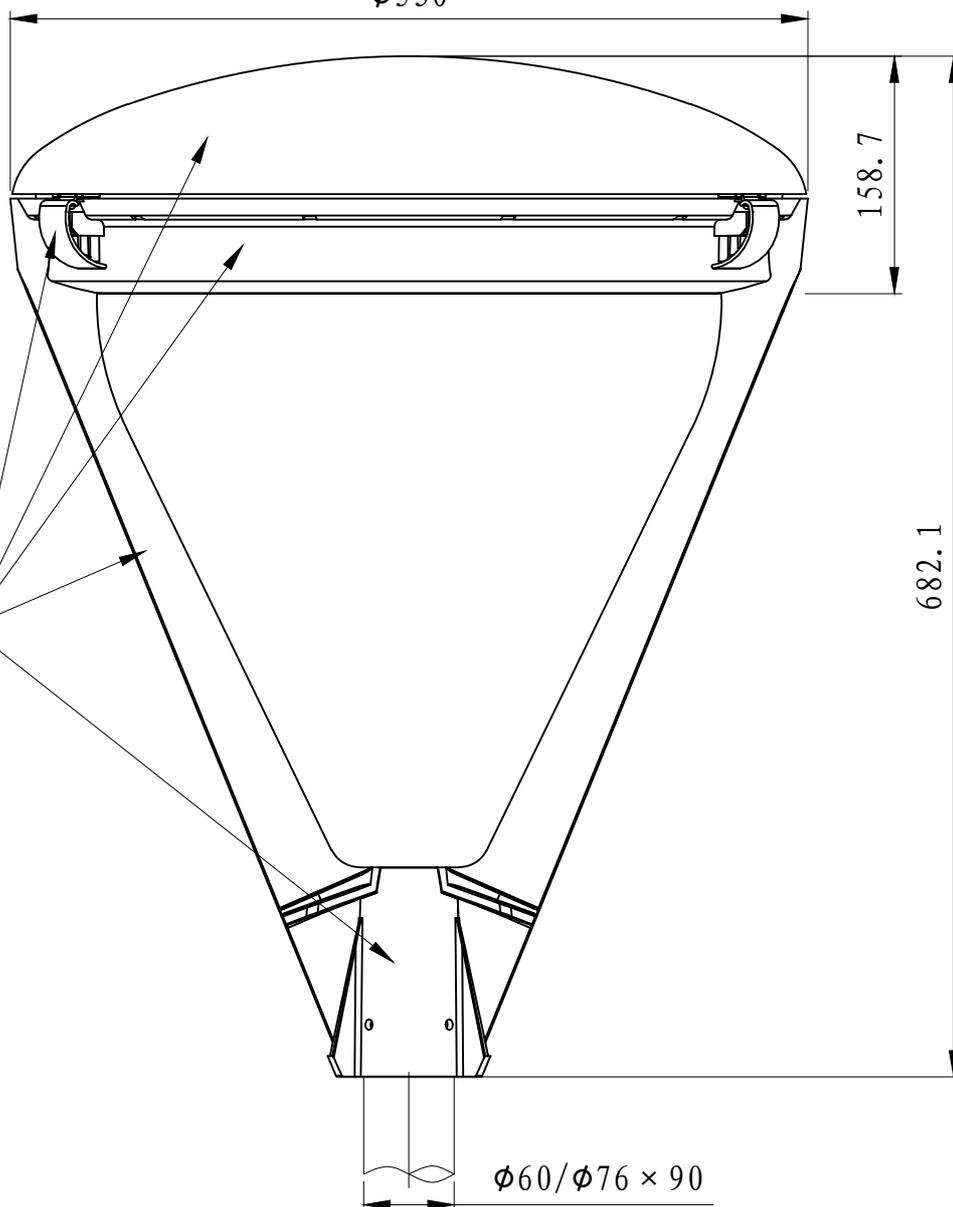

158.7

682.1

High purity aluminum

$\phi 60/\phi 76 \times 90$