

KLED

T-191 Serious


/ 40W-75W /



Urban lighting

A Classic Residential Lighting
with Mediterranean style



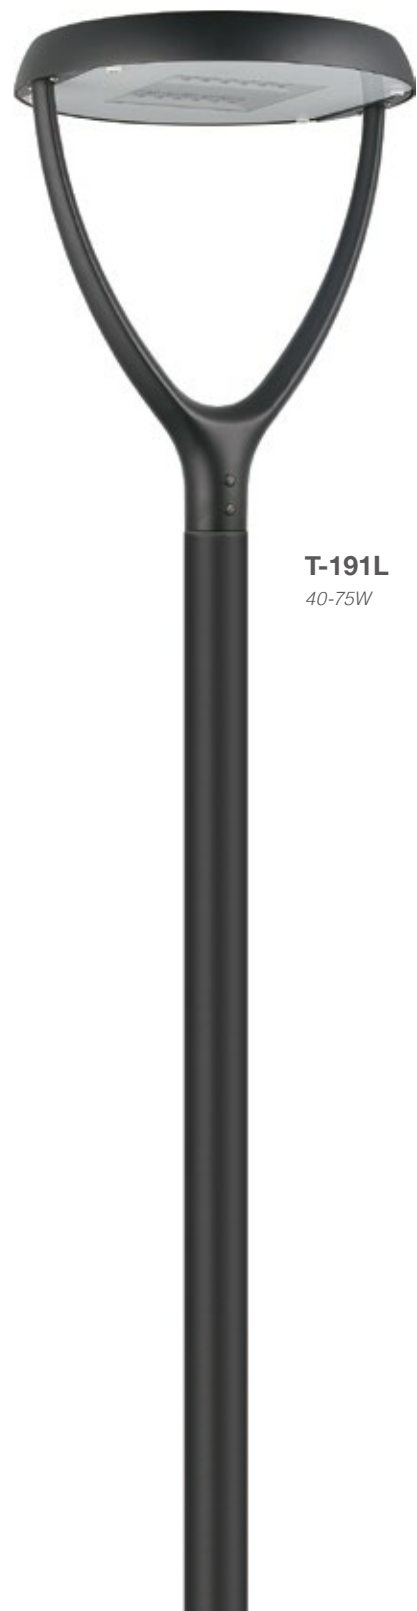

T-191L
40-75W



T-191P
40-75W



D-191H
40-75W




D-191S
40-75W



一组融入现代设计元素的经典LED庭院灯具，灯具设计有多种安装支架，通过更换不同安装支架来达到不同视觉效果，可以广泛应用在广场、公园、小区等场合。灯具功率从40W-75W。

A modern design of classic LED garden lighting, which design has a variety of mounting bracket, through the replacement of different mounting bracket to achieve different visual effect, it can be widely used in square, park, community and other occasions. The power is from 40W to 75W.

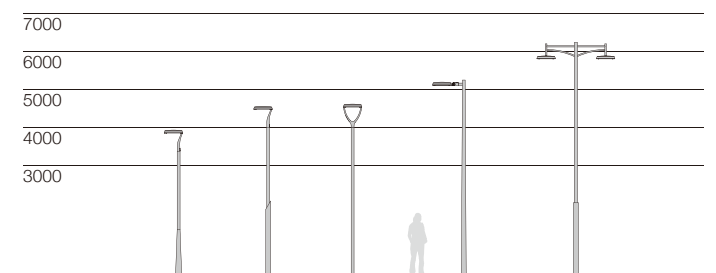



T-191 Series





简述 Description







- 铝压铸灯体外壳，超白钢化玻璃，白色塑料反射罩
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 有多种安装支架供选择搭配，形成多款不同外形灯具
- 有侧装和顶装2种安装方式，角度可调，安装管径有 $\varnothing 60 / \varnothing 76\text{mm}$
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass, white PC plastic reflector.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- There are a variety of mounting brackets options, form of different shapes of lightng.
- Top and side fixing, angle can be adjustable, installation tube diameter $\varnothing 60/\varnothing 76\text{mm}$.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.



应用透镜 Optics application

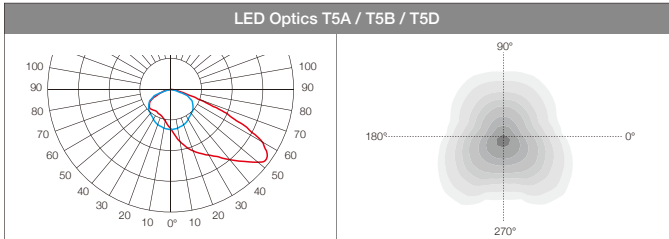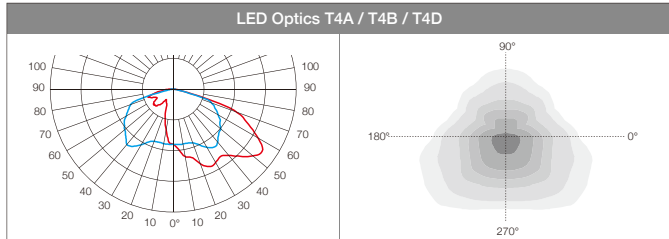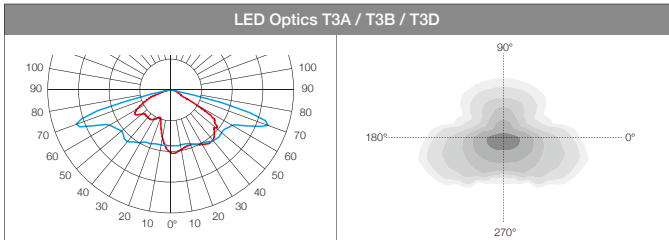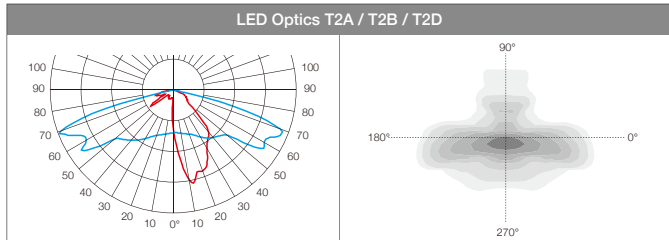

技术参数 Technology data




T-191L

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-191LLED40-16 A4	40W	16	T1A/T2A/T3A/T4A	580*530*190	12.5	440	946
T-191LLED60-24 A2	60W	24	T1A/T2A/T3A/T4A	580*530*190	12.5	440	946
T-191LLED75-36 D2	75W	36	T1D/T2D/T3D/T4D	580*530*190	12.5	440	946

LED chips - 3030

T-191LLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	580*530*190	12.5	440	946
T-191LLED60-84 B2	60W	84	T1B/T2B/T3B/T4B	580*530*190	12.5	440	946




T-191P

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-191PLED40-16 A4	40W	16	T1A/T2A/T3A/T4A	550*510*115	9.7	792	1656
T-191PLED60-24 A2	60W	24	T1A/T2A/T3A/T4A	550*510*115	9.7	792	1656
T-191PLED75-36 D2	75W	36	T1D/T2D/T3D/T4D	550*510*115	9.7	792	1656

LED chips - 3030

T-191PLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	550*510*115	9.7	792	1656
T-191PLED60-84 B2	60W	84	T1B/T2B/T3B/T4B	550*510*115	9.7	792	1656




D-191H

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-191HLED40-16 A4	40W	16	T1A/T2A/T3A/T4A	540*505*115	9.0	792	1656
D-191HLED60-24 A2	60W	24	T1A/T2A/T3A/T4A	540*505*115	9.0	792	1656
D-191HLED75-36 D2	75W	36	T1D/T2D/T3D/T4D	540*505*115	9.0	792	1656

LED chips - 3030

D-191HLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	540*505*115	9.0	792	1656
D-191HLED60-84 B2	60W	84	T1B/T2B/T3B/T4B	540*505*115	9.0	792	1656




D-191S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-191SLED40-16 A4	40W	16	T1A/T2A/T3A/T4A	500*500*125	8.3	748	1564
D-191SLED60-24 A2	60W	24	T1A/T2A/T3A/T4A	500*500*125	8.3	748	1564
D-191SLED75-36 D2	75W	36	T1D/T2D/T3D/T4D	500*500*125	8.3	748	1564

LED chips - 3030

D-191SLED40-56 B4	40W	56	T1B/T2B/T3B/T4B	500*500*125	8.3	748	1564
D-191SLED60-84 B2	60W	84	T1B/T2B/T3B/T4B	500*500*125	8.3	748	1564



可选配件 Accessories options

	Code
Ø60-76转接头 Pole reducer	210001465
Required for install on the pole.	

延伸产品 More in family

SOLAR OPTIONS



TS-191L

Solar Lighting: 12W.



TS-191P

Solar Lighting: 12W.



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928