




D-210

KLED



D-210
75-180W

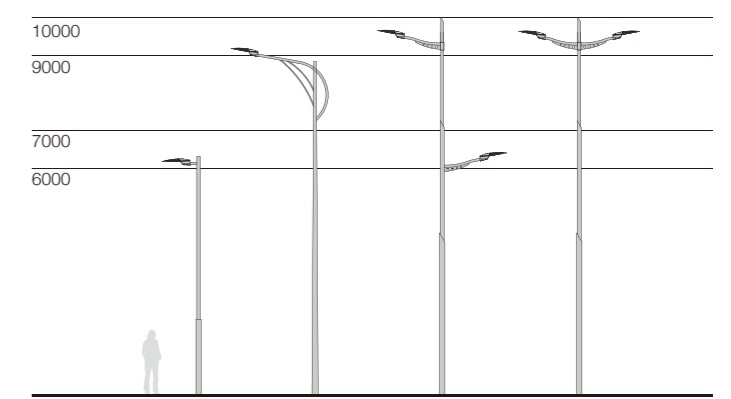


简述 Description




- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 定制快速开启螺钉配置，内设有开启断电保护器
- 有侧装和顶装2种安装方式，角度可调，安装管径有Ø48 / Ø60mm
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- Tool-free replaceable, special screw for opened device, automatic on/off connector when be open.
- Top and side fixing, angle can be adjustable, installation tube diameter Ø48/Ø60mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

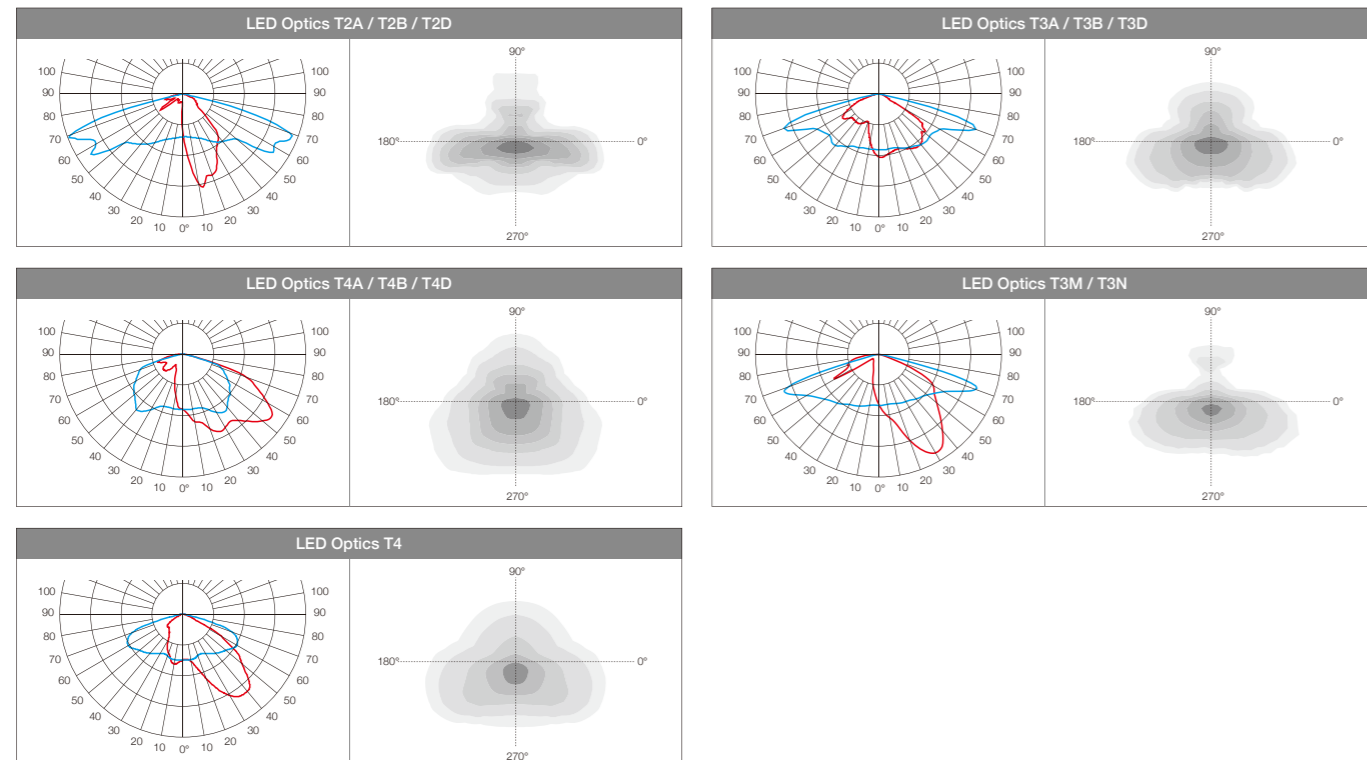

技术参数 Technology data



D-210

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-210LED75-32	75W	32	T3A/T4A/T5A/T4	780*330*190	9.0	528	1100
D-210LED100-32	100W	32	T3A/T4A/T5A/T4	780*330*190	9.0	528	1100
D-210LED120-48	120W	48	T3A/T4A/T5A/T4	780*330*190	9.0	528	1100
D-210LED150-48	150W	48	T3A/T4A/T5A/T4	780*330*190	9.0	528	1100
D-210LED180-72	180W	72	T2D/T3D/T4D/T3N	780*330*190	9.0	528	1100
LED chips - 3030							
D-210LED100-112	100W	112	T2B/T3B/T4B	780*330*190	9.0	528	1100
D-210LED150-168	150W	168	T2B/T3B/T4B	780*330*190	9.0	528	1100



IK09钢化玻璃罩，可适配Zhaga标准PCB板，模组式透镜供多种不同光型可选
IK09 tempered glass, it is suitable for zhaga standard PCB board. Modular lens is available for various light types.



IP66电器腔室，可以接入智能照明控制实现节能，免工具打开装置设计
IP66 electrical housing, it can be install dimming control system to saving engine, free tooling to open.



流线型灯具外形设计，顶部设置有NEMA标准插座，可连接智慧城市控制和管理系统
Streamlined lighting shape design, with NEMA standard socket on the top, which can be connected with smart city.

可选配件 Accessories options

	Code
Ø60安装座 Fixing Arm	210000218
Ø48安装座 Fixing Arm	210001039

Arm / Adapter required for install on the pole.