

The photograph may not match the reference exactly.
Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS




Product Model:	T-191PLED80-36		T-191PLED60-24		T-191PLED30-16		T-191PLED40-56B	T-191PLED60-84B
IP Protection degrees:	IP66		IP66		IP66		IP66	IP66
IK Protection degrees:	IK09		IK09		IK09		IK09	IK09
Light source:	36 X CREE LED 80W Warm White - 4000K 8400Lm ^(N) CRI 70	36 X LUXEON 5050 80W Warm White - 4000K 10240Lm ^(N) CRI 70	24X CREE LED 60W Warm White - 4000K 6300Lm ^(N) CRI 70	24X LUXEON 5050 60W Warm White - 4000K 7680Lm ^(N) CRI 70	16 X CREE LED 30W Warm White - 4000K 3150Lm ^(N) CRI 70	16X LUXEON 5050 30W Warm White - 4000K 3840Lm ^(N) CRI 70	16X LUXEON 3030 40W Warm White - 4000K 4600Lm ^(N) CRI 70	16X LUXEON 3030 60W Warm White - 4000K 6850Lm ^(N) CRI 70
Total power consumption(W):	80		60		30		40	60
Voltage/Frequency:	100-240V/50-60Hz		100-240V/50-60Hz		100-240V/50-60Hz		100-240V/50-60Hz	100-240V/50-60Hz
Warranty(Years):	5		5		5		5	5
Units per box:	1		1		1		1	1





MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)


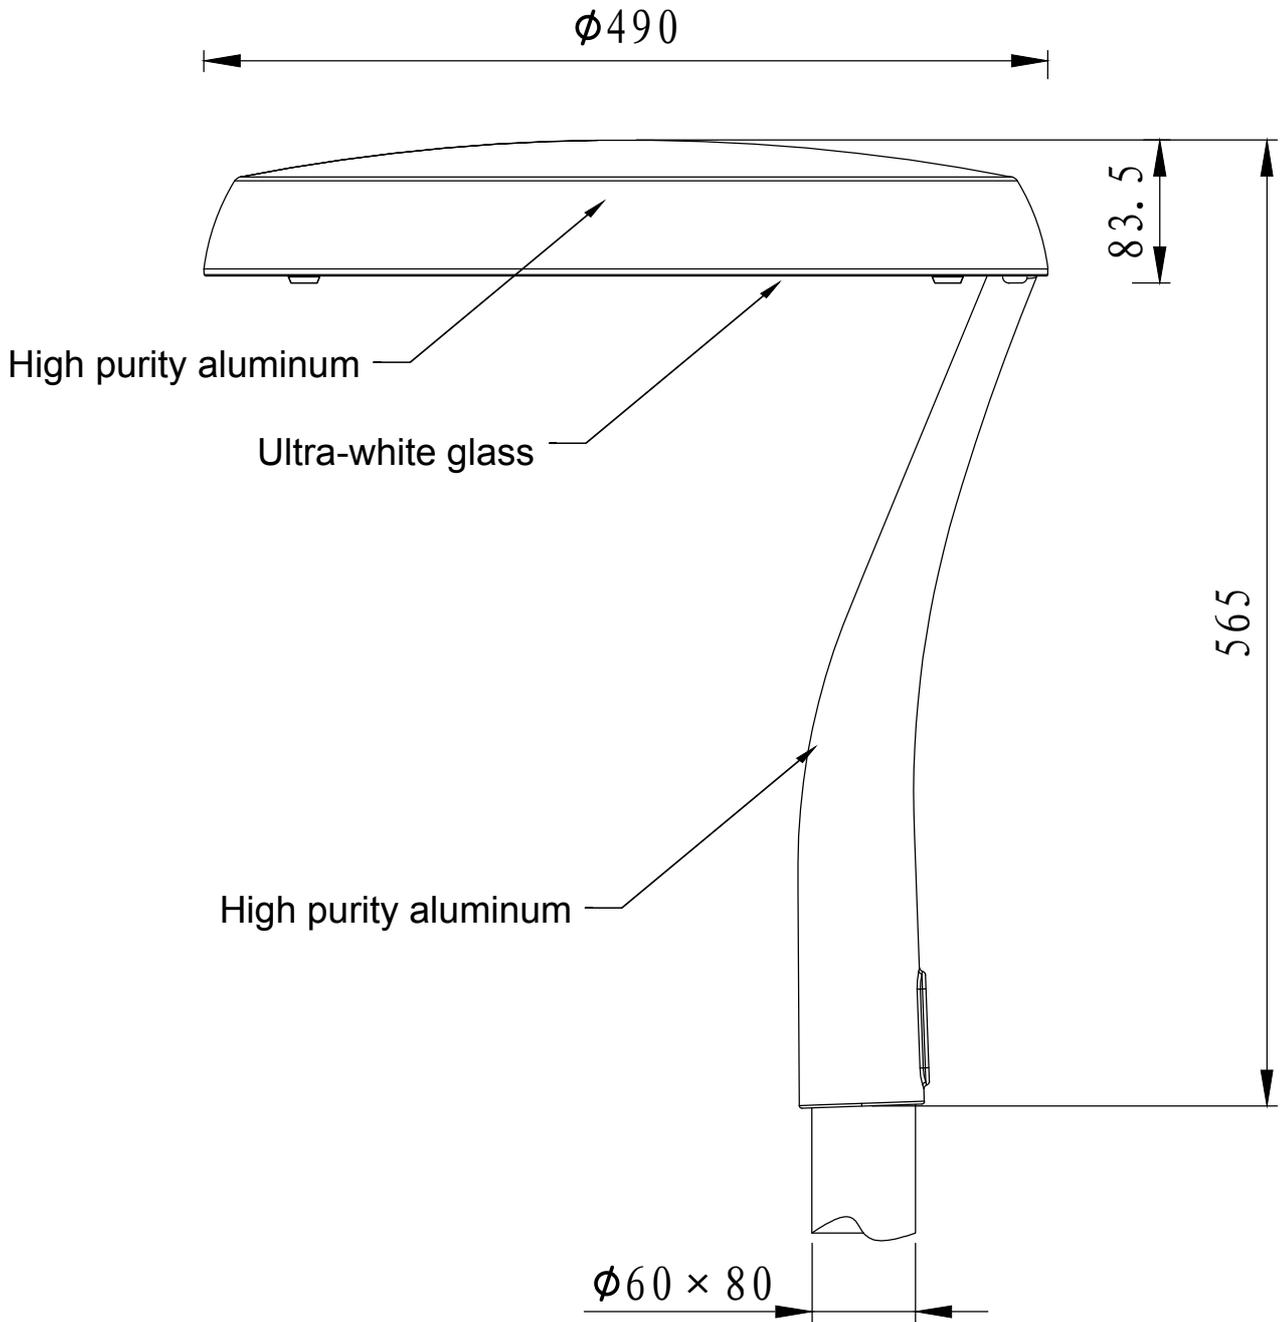


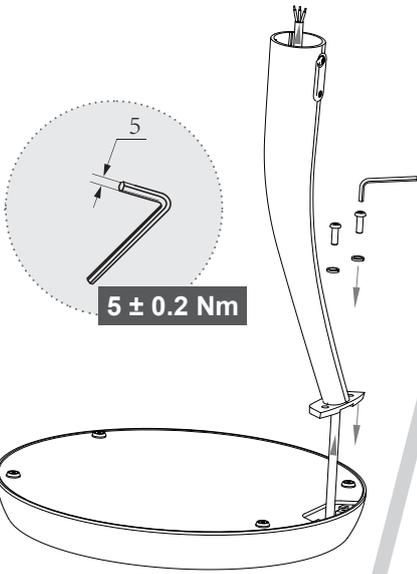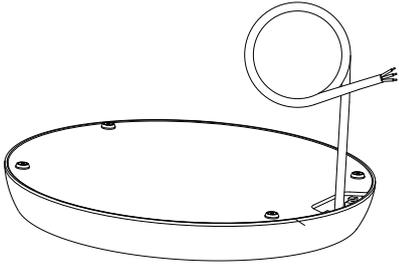


$5 \pm 0.2 \text{ Nm}$

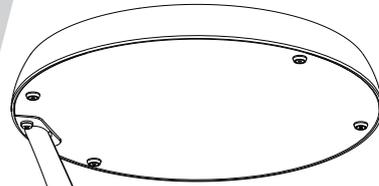


5

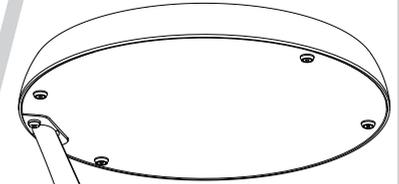

$5 \pm 0.2 \text{ Nm}$



Caution, risk of electric shock!

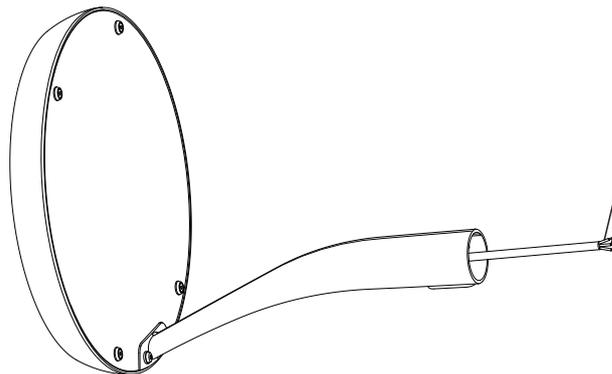

MAINS - min. 3x1mm²
L -> Brown
PE-> Green-yellow
N -> Blue