




The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

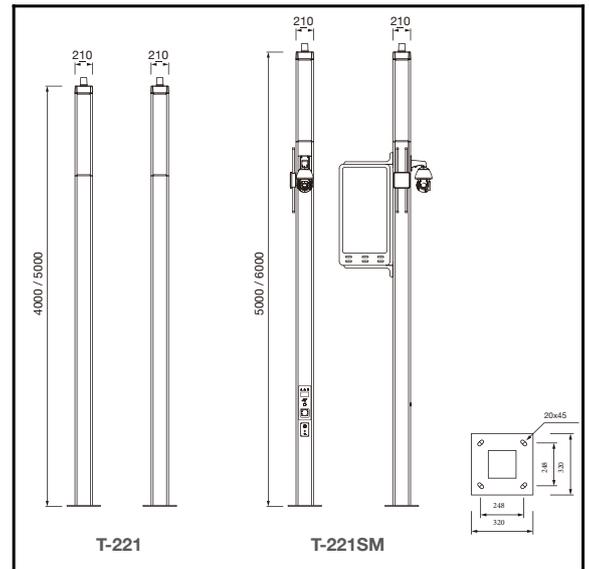

Product Model:	T-221LED60-24H400	T-221LED60-24H500	
	T-221SMLED60-24H400	T-221SMLED60-24H500	T-221SMLED60-24H600
IP Protection degrees:	IP66		
IK Protection degrees:	IK09		
Light source:	24 x LUXEON 5050		
Total power consumption:	60W		
Luminous Flux:	6400-7000Lm		
Luminous efficiency:	107-117Lm/w		
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available		
Voltage/Frequency:	100-240V/50-60Hz		
Warranty(Years):	5		
Units per box:	1		
Net Weight(Kg)	57/77	66/88	99


MATERIALS / FINISHES

Structure material: Galvanized iron	aiffuser material: PMMA
Structure finish: Silver	Diffuser finish: Transparent


GEAR

Multi-voltage electronic gear included (220-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

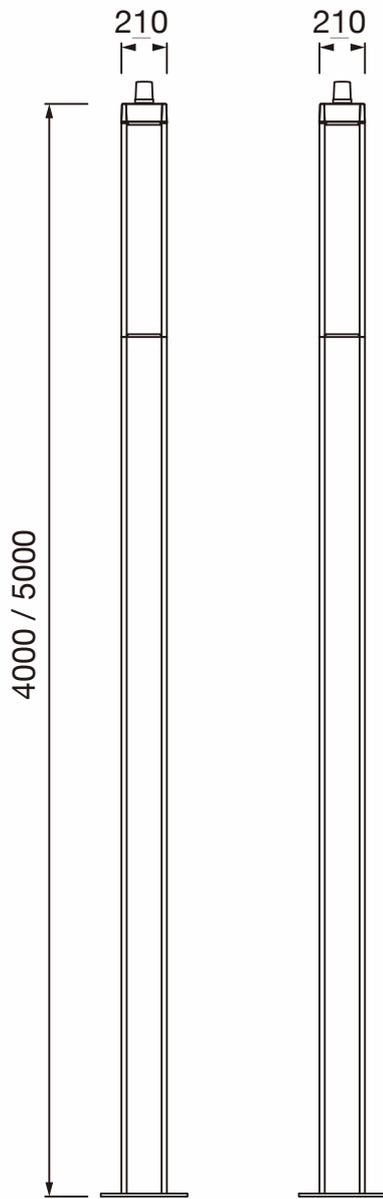

T-221

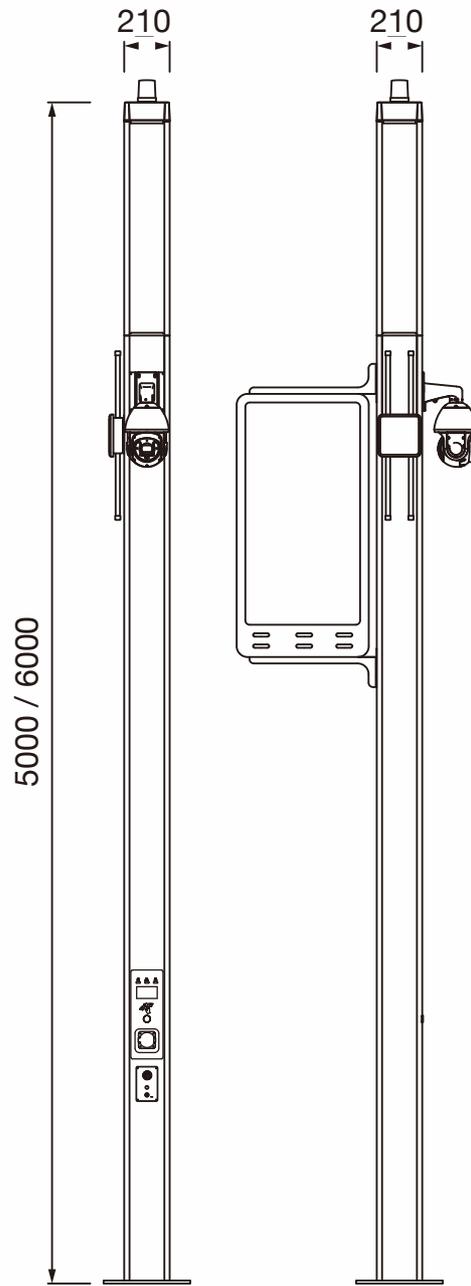

T-221SM