




T-101 Series



T-101
50W

T-101L
50W

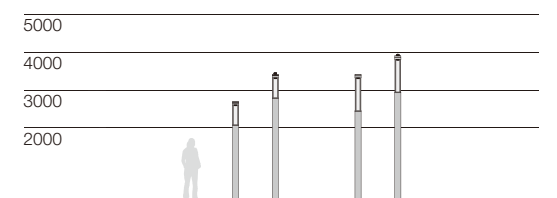


简述 Description



- 铝压铸上盖和铝合金型材灯柱，根据需要切割成不同灯杆高度，PC透明塑料罩
- 灯具配光有2种形式，顶部SMD光源外加防眩罩，具有很高视觉舒适性
- 驱动有0~10V / DALI / 编程电源选择，20KV浪涌保护器
- 模块式电器部件，安装更换方便
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471：2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium top cover, extruded aluminaium column pole, the height according to the client required, PC transparent diffuser.
- There are two forms of light distribution: Top SMD light source with anti glare rouvre.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- LED module is used inside, Integrated electrical components which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.


应用透镜 Optics application

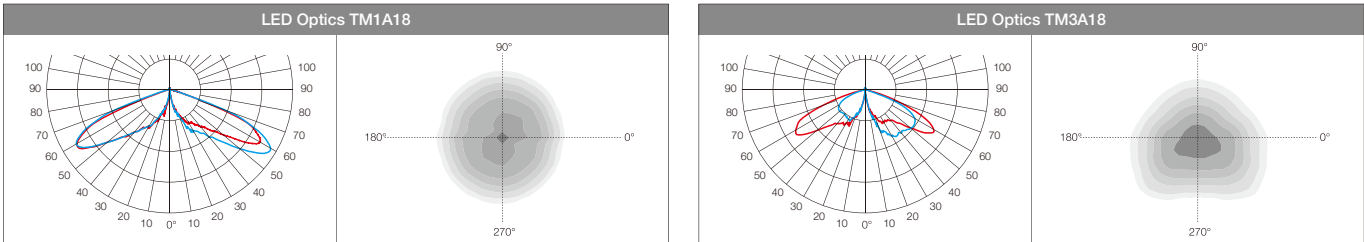


技术参数 Technology data




T-101							
Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050							
T-101LED50-18H270	50W	18	TM1A18/TM3A18	2750*295*295	27	98	196
T-101LED50-18H350	50W	18	TM1A18/TM3A18	Head: 1070*200*205 Pole: 2900*295*305	19	87	180



T-101L							
Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 5050							
T-101LLED50-18H350	50W	18	TM1A18/TM3A18	Head: 1410*200*205 Pole: 2550*295*305	20	88	176
T-101LLED50-18H400	50W	18	TM1A18/TM3A18	Head: 1410*200*205 Pole: 3050*295*305	11	49	147

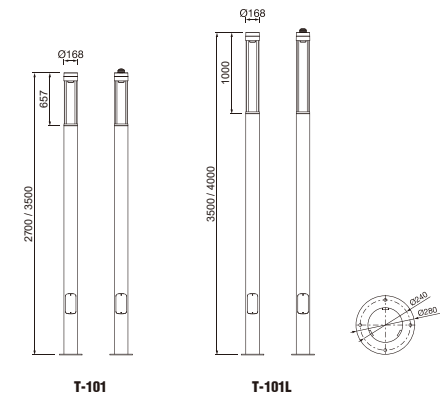

独立防水电器部件
Independent waterproof electrical components.



防水接线盒，内置保险断路器
Waterproof junction box with built-in fuse circuit breaker.

可选配件 Accessories options		
		Code
	接线盒 Junction Box	230000199
	基础螺杆 Anchor Bolts	250000293