



T-85 Series




T-85MN
30-75W



T-85M
30-75W



T-85MW
30-75W

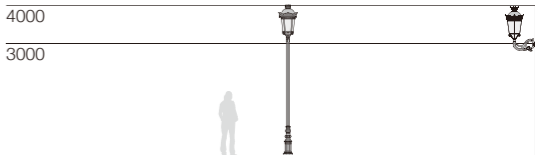

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃，镀铬塑料反射罩，PMMA塑料扩散罩可选
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 古典式外形设计，配有多种安装支架及不同安装方式
- 灯具采用LED模组，安装更换方便
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质



MD-06A LED Module

- Die-casting aluminium body, super white tempered glass, Chrome plastic reflector, PMMA plastic diffuser optional.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- Classical shape design, with a variety of mounting brackets and different installation methods.
- LED module is used inside, which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

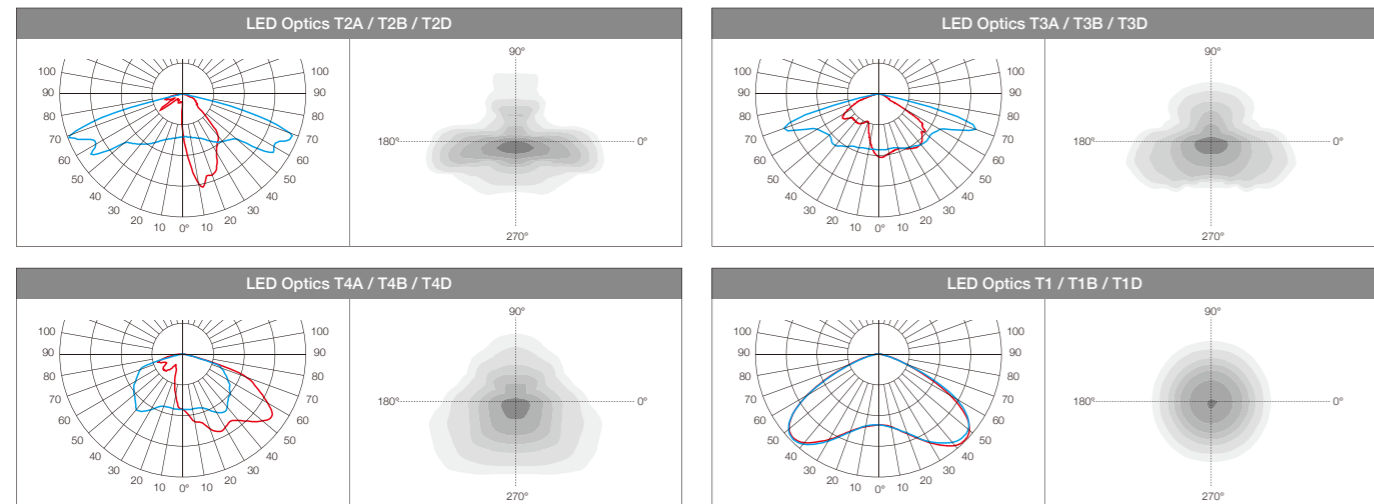


技术参数 Technology data



T-85MN

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-85MNLED30-12	30W	12	T1/T2A/T3A/T4A	495*495*895	11.5	112	236
T-85MNLED40-16	40W	16	T1/T2A/T3A/T4A	495*495*895	11.5	112	236
T-85MNLED60-24	60W	24	T1/T2A/T3A/T4A	495*495*895	11.7	112	236
T-85MNLED75-32	75W	32	T1/T2A/T3A/T4A	495*495*895	11.7	112	236




LED chips - 3030

T-85MNLED40-42	40W	42	T1B/T2B/T3B/T4B	495*495*895	11.5	112	236
T-85MNLED60-84	60W	84	T1B/T2B/T3B/T4B	495*495*895	11.7	112	236



T-85M

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-85MLED30-12	30W	12	T1/T2A/T3A/T4A	495*495*895	11.5	112	236
T-85MLED40-16	40W	16	T1/T2A/T3A/T4A	495*495*895	11.5	112	236
T-85MLED60-24	60W	24	T1/T2A/T3A/T4A	495*495*895	11.7	112	236
T-85MLED75-32	75W	32	T1/T2A/T3A/T4A	495*495*895	11.7	112	236




LED chips - 3030

T-85MLED40-42	40W	42	T1B/T2B/T3B/T4B	495*495*895	11.5	112	236
T-85MLED60-84	60W	84	T1B/T2B/T3B/T4B	495*495*895	11.7	112	236



T-85MW

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-85MWLED30-12	30W	12	T1/T2A/T3A/T4A	495*495*895	14.5	88	190
T-85MWLED40-16	40W	16	T1/T2A/T3A/T4A	495*495*895	14.5	88	190
T-85MWLED60-24	60W	24	T1/T2A/T3A/T4A	495*495*895	14.5	88	190
T-85MWLED75-32	75W	32	T1/T2A/T3A/T4A	495*495*895	14.5	88	190



LED chips - 3030

T-85MWLED40-42	40W	42	T1B/T2B/T3B/T4B	495*495*895	14.5	88	190
T-85MWLED60-84	60W	84	T1B/T2B/T3B/T4B	495*495*895	14.5	88	190

Bracket:
620*340*485/5pcs

可选配件 Accessories options

	Code
防水连接器 IP68 Connector	320000047
透明罩 Transparent PC diffuser	210000197
钻石透明罩 Diamond PC diffuser	210000198
3/4"铜接头 Copper Screw	250000093 250000094
Ø60安装座 Fixing Arm	210000431
安装花臂 Fixing Arm	250000467

Adapter required for install on the pole.