

KLED

D-180 Serious

/ 25W-150W /

Urban lighting

A Classic Residential Lighting
with Mediterranean style



D-180M
75-150W




D-180S
25-60W



一组经济型实用型路灯，造型简洁，功能齐全，能满足各种道路照明需要，灯具功率从25W-150W。

An economical and practical street lighting, simple in shape and complete in function, can meet the needs of various road lighting, with lamp power from 25W to 150W.

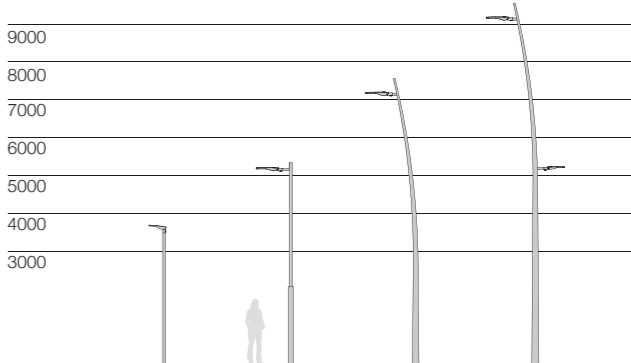

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 灯具采用下翻盖开启方式，设有特殊定制开启螺钉
- 有侧装和顶装2种安装方式，角度可调，安装管径有 $\varnothing 48 / \varnothing 60 / \varnothing 76\text{mm}$
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- The lighting cover is opened downwards, with special customized opening screw.
- Top and side fixing, angle can be adjustable, installation tube diameter $\varnothing 48/\varnothing 60/\varnothing 76\text{mm}$.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.



应用透镜 Optics application

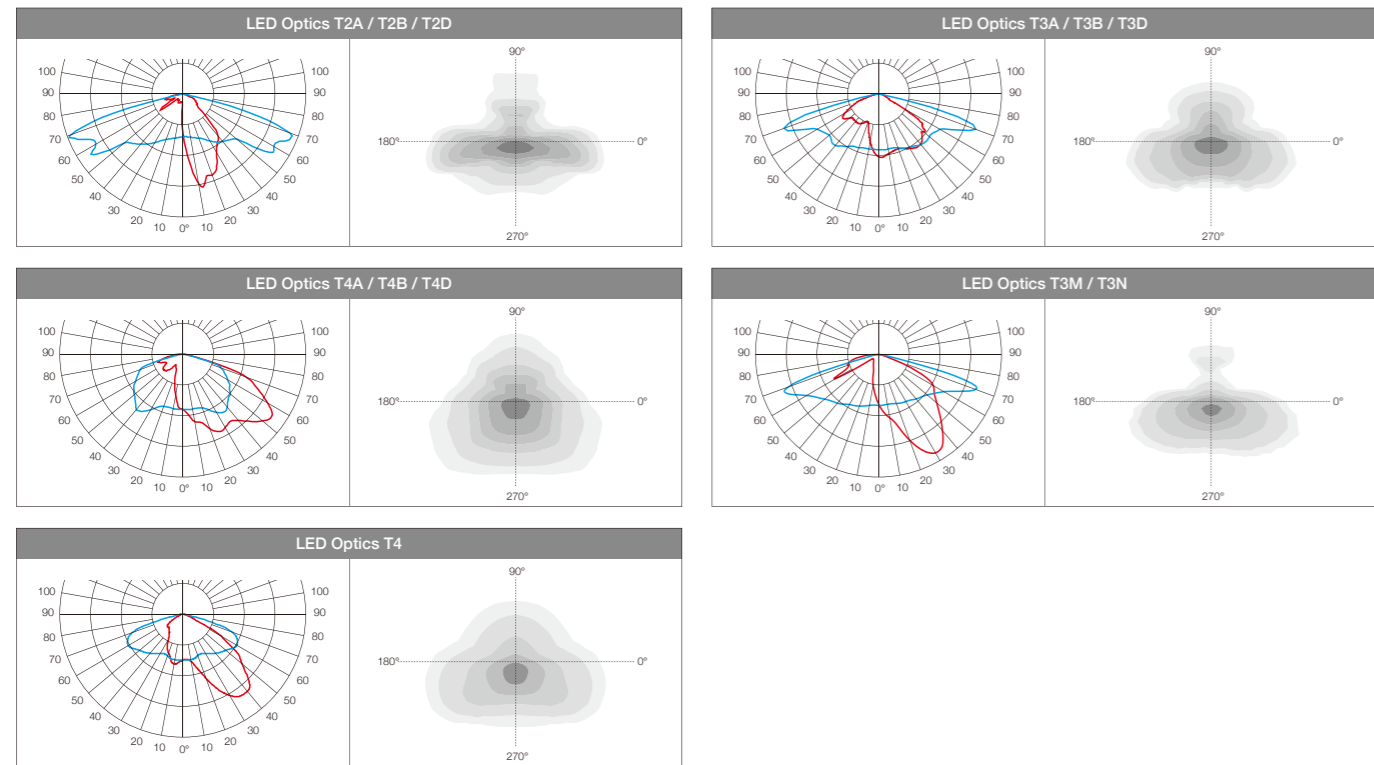


技术参数 Technology data



D-180M

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-180MLED75-32	75W	32	T2A/T3A/T4A/T3M/T4	735*330*150	7.0	825	1695
D-180MLED100-48	100W	48	T2A/T3A/T4A/T3M/T4	735*330*150	7.0	825	1695
D-180MLED120-48	120W	48	T2A/T3A/T4A/T3M/T4	735*330*150	7.0	825	1695
D-180MLED150-72	150W	72	T2D/T3D/T4D/T3N	735*330*150	7.0	825	1695




LED chips - 3030

D-180MLED100-112	100W	112	T2B/T3B/T4B	735*330*150	7.0	825	1695
D-180MLED150-168	150W	168	T2B/T3B/T4B	735*330*150	7.0	825	1695



D-180S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-180SLED25-8	25W	8	T2A/T3A/T3M	585*195*110	3.8	1785	3740
D-180SLED40-16	40W	16	T2A/T3A/T3M	585*195*110	3.8	1785	3740
D-180SLED60-24	60W	24	T2D/T3D/T3N	585*195*110	3.8	1785	3740



LED chips - 3030

D-180SLED25-28	25W	28	T2B/T3B/T4B	585*195*110	3.8	1785	3740
D-180SLED60-56	60W	56	T2B/T3B/T4B	585*195*110	3.8	1785	3740

Normally Version:
D-180S / D-180M



"A" Version:
D-180SA / D-180MA



可选配件 Accessories options

	Code
$\varnothing 76$ 安装座 Fixing Arm	210001086
$\varnothing 60$ 安装座 Fixing Arm	210000255
$\varnothing 60-48$ 转换套 Adapter Arm / Adapter required for install on the pole.	210002547



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928