

KLED

T-10 Serious

/ 25W-75W /



Urban lighting

A Classic Residential Lighting
with Mediterranean style



T-10 Series



T-10A
25-75W




T-10B
40-60W



古典球形设计LED庭院灯，设计灵感来自地球，能使照明灯具很好的融入到自然环境中。灯具有多种光源配置形式，根据照明效果来自由选择应用。

A classical spherical design led garden lighting, it design inspiration from the earth, can make lighting and lanterns into the natural environment. This luminaire have a variety of light source configuration, according to the lighting effect to choose the application freely.

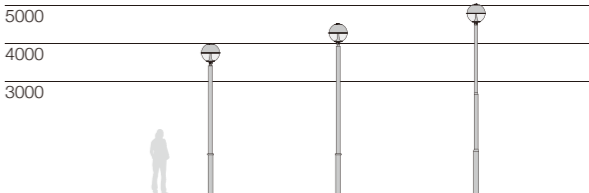

简述 Description






- 铝压铸灯体外壳，PC透明塑料罩
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 灯具光源有2种不同配置方式，独立模组式和模组透镜、光源圆呈周布置形式
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质



MD-07 LED Module

- Die-casting aluminium body, PC transparent diffuser.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- There are two different configuration: Moduler and module lens with light source circle are arranged in a circular form.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

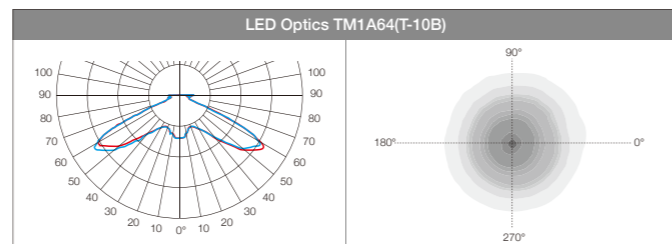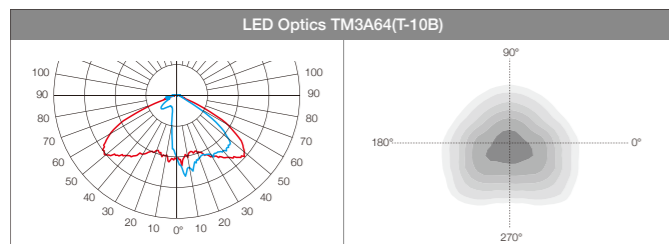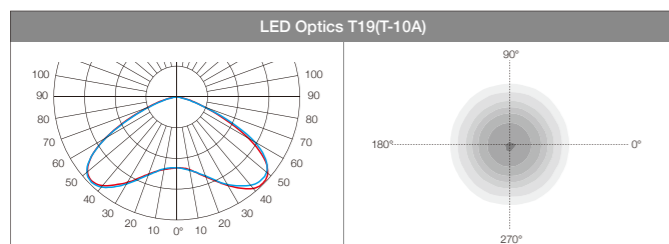


技术参数 Technology data




T-10A

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|-----------------------|-------|---------|--------|--------------|--------|---------|---------|
| LED chips - 3535/5050 | | | | | | | |
| T-10ALED40-2MD07 | 40W | 18 | T19 | 525*525*615 | 10.8 | 176 | 352 |
| T-10ALED60-4MD07 | 60W | 36 | T19 | 525*525*615 | 12.3 | 176 | 352 |
| T-10ALED75-4MD07 | 75W | 36 | T19 | 525*525*615 | 12.3 | 176 | 352 |




LED chips - 3030

| | | | | | | | |
|------------------|-----|----|-----|-------------|------|-----|-----|
| T-10ALED25-2MD07 | 25W | 18 | T19 | 525*525*615 | 10.8 | 176 | 352 |
| T-10ALED40-4MD07 | 40W | 36 | T19 | 525*525*615 | 12.3 | 176 | 352 |



T-10B

| Code | Power | LED Qty | Optics | Packing Size | Weight | Pcs/20" | Pcs/40" |
|------------------|-------|---------|--------|--------------|--------|---------|---------|
| LED chips - 2835 | | | | | | | |
| T-10BLED40-128 | 40W | 128 | T32B | 525*525*615 | 9.4 | 176 | 352 |
| T-10BLED60-128 | 60W | 128 | T32B | 525*525*615 | 9.4 | 176 | 352 |



T-10A



灯具采用MD-07 模组，具有2模组和4模组两个版本，安装维修方便

It with MD-07 module, it has two versions for 2 module and 4 module, which is convenient for installation and maintenance.

T-10B



LED呈圆周分布，有对称和非对称光学选项，具有非常舒适的照明效果

The LED is evenly distributed 360° around the circumference, it has symmetric and asymmetric optical options, which has a good optical visual effect.



— King-Bridge Lighting —



宁波金羽桥照明科技有限公司

NING KING-BRIDGE LIGHTING TECHNOLOGY CO.,LTD.

地址：浙江省余姚市阳明街道新桥工业区

Add: Xinqiao Industry Zone, Yangming Street, Yuyao City, Zhejiang Province, China

Tel: +86-574-6256 6890

Fax: +86-574-6256 6827

info@kled.com

国内营销中心：金羽桥照明科技（上海）有限公司

地址：上海市长宁区中山西路179号4K室

电话：189 1897 7928