




M-03 ~ M-07 Series



Normally Type  
Decorative plate



"A" Type  
Honeycomb louvre



"B" Type  
Diffuser optics



**M-03**  
Ø120 / 3 LEDs



M-03 / 6W



M-03A / 6W



M-03B / 3W

**M-04**  
Ø150 / 6 LEDs



M-04 / 12W



M-04A / 12W



M-04B / 6W

**M-05**  
Ø180 / 12 LEDs



M-05 / 25W



M-05A / 25W



M-05B / 12W

**M-06**  
Ø220 / 18 LEDs



M-06 / 40W



M-06A / 40W

**M-07**  
Ø260 / 25 LEDs




M-07 / 60W



M-07A / 60W

简述 Description



- 铝压铸灯体外壳，304不锈钢面板
- 10mm厚台阶高强度钢化玻璃，确保过IK10标准测试要求
- 多种光学配件选项，具有高视觉舒适性和防眩效果
- 耐高温防水硅胶圈、耐腐蚀PP塑料埋件
- 根据需要要有地板 / 地面 / 墙面嵌入式安装应用
- 无生物蓝光危害风险，符号EN62471: 2008 标准
- 所有外部螺钉均为304不锈钢材质

功率: 3-60W  
 光效: 70-100 Lm/W (Ra80)  
 色温: 3000K / 4000K / RGBW  
 输入电压: DC 24V / AC 100-240V  
 功能选项: Switch / DMX

- Die-casting aluminium body, 304 stainless steel fram.
- 10mm higher hardened tempered glass, it ensure pass IK10 standared test.
- Multiple optics options, it with high visual comfort and good anti glare effect.
- High temperature resistant and waterproof silicone rubber ring, corrosion resistant PP plastic installion housing.
- Floor/ground/wall-mounted recessed luminaire intended applications as required.
- No photo-biological risk, in accordance with EN 62471:2008.
- All external screw are made of 304 stainless steel.

Power: 3-60W  
 Nominal efficacy: 70-100 Lm/W (Ra80)  
 CCT: 3000K / 4000K / RGBW  
 Input voltage: DC 24V / AC 100-240V  
 Options: Switch / DMX

- 应用场合: 适用于庭院、草地、建筑物、雕塑、标志物广告牌等景观照明场所
- Applications: It can be used for landscape lighting places such assuch as courtyard, lawn, buildings, sculptures, signs and billboards etc.


安全性能 Satety performance

装在地面或地板的嵌入式灯具符合标准防滑和抗压要求，触碰灯具表面温度控制在安全标准之内

Ground and floor level recessed luminaires, have different degrees of resistance to torsion and shear, up to 2000 Kg in accordance with EN 60598-2-13.



Temperature < 40° C



Diffuser optics versions complete with non-slip glass




Resistance to static load (5000 Kg)


安装应用 Installation

灯具可适用于地板、墙面和地面多种安装场地应用

Installation in floor / wall / ground, Multiple applications for formal continuity.

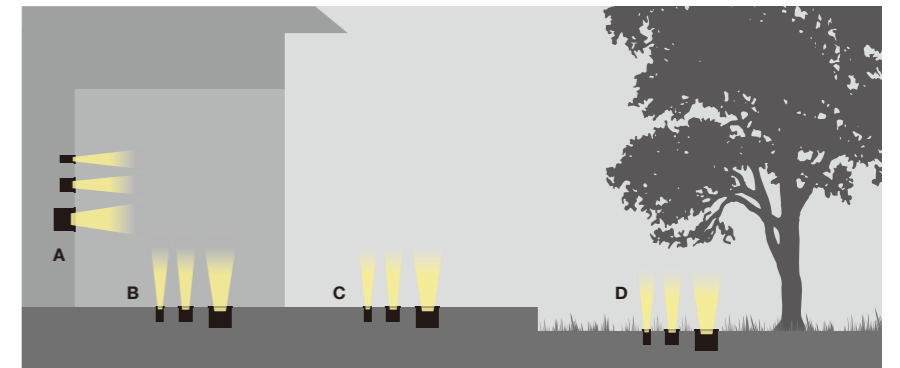

A Wall B Indoor floor C Outdoor floor D Ground




Ground installation



Floor installation



Wall-mounted installation



Application for wall washer



Application for tree light



材质 Materials

高品质的材质选择，确保高品质的产品质量，高强度钢化玻璃面板，确保IK10，PP预埋件底座，特殊设计的光学组件，使得灯具具有高性能的光学参数

We select materials of highest possible quality, to ensure high-degree product quality. High sturdy tempered glass with protection up to IK10, PP plastic installation housing, special design optics to keep the fixture higher performance levels.




技术参数 Technology data

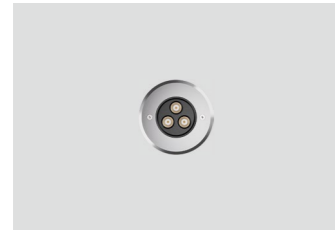


**M-03**

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535							
M-03LED6-3	6W	3	Switch	DC 24V / AC 100-240V	25° / 50°	385*260*125/6pcs	5
M-03LED6-3RGBW	6W	3	DMX	DC 24V / AC 100-240V	25° / 50°	385*260*125/6pcs	5
LED chips - 3535							
M-03ALED6-3	6W	3	Switch	DC 24V / AC 100-240V	25° / 50°	385*260*125/6pcs	5
M-03ALED6-3RGBW	6W	3	DMX	DC 24V / AC 100-240V	25° / 50°	385*260*125/6pcs	5
LED chips - 2835/3030							
M-03BLED3-18	3W	18	Switch	DC 24V / AC 100-240V	120°	385*260*125/6pcs	5
M-03BLED3-3RGBW	3W	3	DMX	DC 24V / AC 100-240V	120°	385*260*125/6pcs	5




**M-04**

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535							
M-04LED12-6	12W	6	Switch	DC 24V / AC 100-240V	25° / 50°	320*320*150/4pcs	6.1
M-04LED12-6RGBW	12W	6	DMX	DC 24V / AC 100-240V	25° / 50°	320*320*150/4pcs	6.1
LED chips - 3535							
M-04ALED12-6	12W	6	Switch	DC 24V / AC 100-240V	25° / 50°	320*320*150/4pcs	6.1
M-04ALED12-6RGBW	12W	6	DMX	DC 24V / AC 100-240V	25° / 50°	320*320*150/4pcs	6.1
LED chips - 2835/3030							
M-04BLED6-28	6W	28	Switch	DC 24V / AC 100-240V	120°	320*320*150/4pcs	6.1
M-04BLED6-6RGBW	6W	6	DMX	DC 24V / AC 100-240V	120°	320*320*150/4pcs	6.1




**M-05**

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535							
M-05LED25-12	25W	12	Switch	DC 24V / AC 100-240V	25° / 50°	380*380*165/4pcs	9.4
M-05LED25-12RGBW	25W	12	DMX	DC 24V / AC 100-240V	25° / 50°	380*380*165/4pcs	9.4
LED chips - 3535							
M-05ALED25-12	25W	12	Switch	DC 24V / AC 100-240V	25° / 50°	380*380*165/4pcs	9.4
M-05ALED25-12RGBW	25W	12	DMX	DC 24V / AC 100-240V	25° / 50°	380*380*165/4pcs	9.4
LED chips - 2835/3030							
M-05BLED12-48	12W	48	Switch	DC 24V / AC 100-240V	120°	380*380*165/4pcs	9.4
M-05BLED12-12RGBW	12W	12	DMX	DC 24V / AC 100-240V	120°	380*380*165/4pcs	9.4

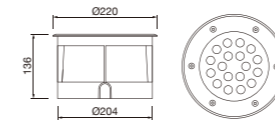

**M-06**

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535							
M-06LED40-18	40W	18	Switch	DC 24V / AC 100-240V	25° / 50°	460*460*175/4pcs	11
M-06LED40-18RGBW	40W	18	DMX	DC 24V / AC 100-240V	25° / 50°	460*460*175/4pcs	11
LED chips - 3535							
M-06ALED40-18	40W	18	Switch	DC 24V / AC 100-240V	25° / 50°	460*460*175/4pcs	11
M-06ALED40-18RGBW	40W	18	DMX	DC 24V / AC 100-240V	25° / 50°	460*460*175/4pcs	11

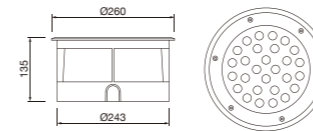

**M-07**

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Packing Size	Weight
LED chips - 3535							
M-07LED60-28	60W	28	Switch	DC 24V / AC 100-240V	25° / 50°	540*275*170/2pcs	9.8
M-07LED60-28RGBW	60W	28	DMX	DC 24V / AC 100-240V	25° / 50°	540*275*170/2pcs	9.8
LED chips - 3535							
M-07ALED60-28	60W	28	Switch	DC 24V / AC 100-240V	25° / 50°	540*275*170/2pcs	9.8
M-07ALED60-28RGBW	60W	28	DMX	DC 24V / AC 100-240V	25° / 50°	540*275*170/2pcs	9.8

安装示意图 Installation

