





简述 Description



- 铝压铸盖帽，铝合金拉伸灯体，可根据需要截取不同高度
  - 高透明PC扩散罩，能有效防止发黄老化
  - 灯具采用间接投射发光模式，具有很好的视觉舒适性
  - 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择
  - 防紫外线聚氨酯塑粉喷涂表面，耐腐蚀可以达到1000小时以上
  - 灯具表面最高温度不超过50度，安全可靠
- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
  - High transparent PC diffuser, it can effectively prevent yellowing and aging.
  - Indirect light luminaire for use with led, which has high visual comfortable.
  - High quality LED chips, Driver with 0-10V/DALI/programmed options.
  - Surface anti-ultraviolet pure polyester powder painting.
  - The maximum surface temperature of all accessible part under 50 degrees.

其他功能选项：移动感应功能 / 双色温切换功能  
 Other Options: Move sensor options / Colour temperature options

配光曲线 Photometric Data

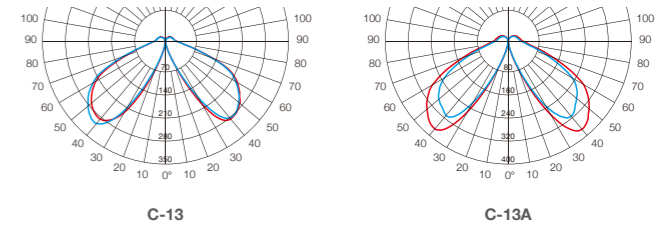

可选配件 Accessories options

	Code
装饰盖 Decorative Cover	220001875
防水接线盒 Terminal Box	230000232
基础预埋件 Anchor Bolts	250000377
膨胀螺钉 Expansion Bolts	613040003


技术参数 Technology data

Code	Power	LED Qty	Input Voltage	Packing Size	Weight
LED chips - 2835					
C-13LED12-42H50	12W	42	100V-240V	530*285*290/4pcs	9.9
C-13LED12-42H80	12W	42	100V-240V	830*285*290/4pcs	13.8
LED chips - 2835					
C-13ALED12-56H50	12W	56	100V-240V	530*285*290/4pcs	9.9
C-13ALED12-56H80	12W	56	100V-240V	830*285*290/4pcs	13.8

延伸产品 More in family



B-13  
Wall Lighting: 12W.  
Page. 408



C-13-A / C-13A-A  
With Flange Version.

