






D-221S
40-75W



D-221SA
40-75W



D-221S
40-75W

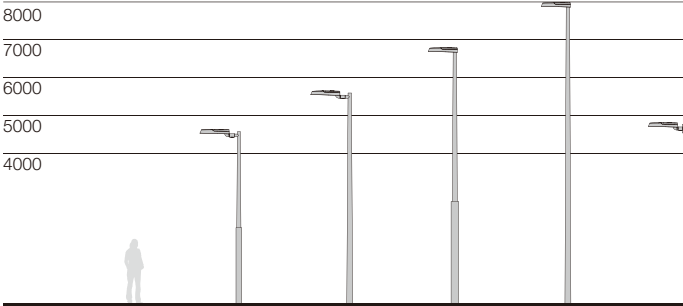



D-221S

一款实用型高端LED路灯，有三种安装方式，功率从40W-75W，可适用于不同道路功能照明需求，多种光学系统可选配。

A practical high-end LED street lighting, there are three installation methods, with power from 40W to 75W. It can be used for lighting requirements of different road functions. A variety of optical systems can be options.



IP66电器腔室，灯具打开时有支撑杆防护，有效保护灯具安全

IP66 electrical box housing, when the lighting open there is support rod protection to effectively protect the safety.



简洁的外形设计，配按钮式开启装置，打开无需工具

Simple shape design, Tool-free replaceable with push-button for opened device.



灯具有横装、竖装二种方式

Top or side fitting Ø60mm.



KLED智能感应设备，通过监控行人及车流量识别，自动调节灯具光通量输出

Kled intelligent sensing equipment can automatically adjust the luminous flux output by monitoring pedestrian and traffic flow identification.



IK08钢化玻璃罩，可适配Zhaga标准PCB板，模组式透镜供多种不同光型可选

IK08 tempered glass, it is suitable for zhaga standard PCB board. Modular lens is available for various light types.


简述 Description





- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0~10V / DALI / 编程电源选择，20KV浪涌保护器
- 按钮式开启装置，打开无需工具
- 有竖装、横装和壁装三种安装方式，安装管径有Ø48 / Ø60mm
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系統可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- Tool-free replaceable with push-botton for opened device.
- There are three installation modes: vertical installation, horizontal installation and wall installation, installation tube diameter Ø48/Ø60mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

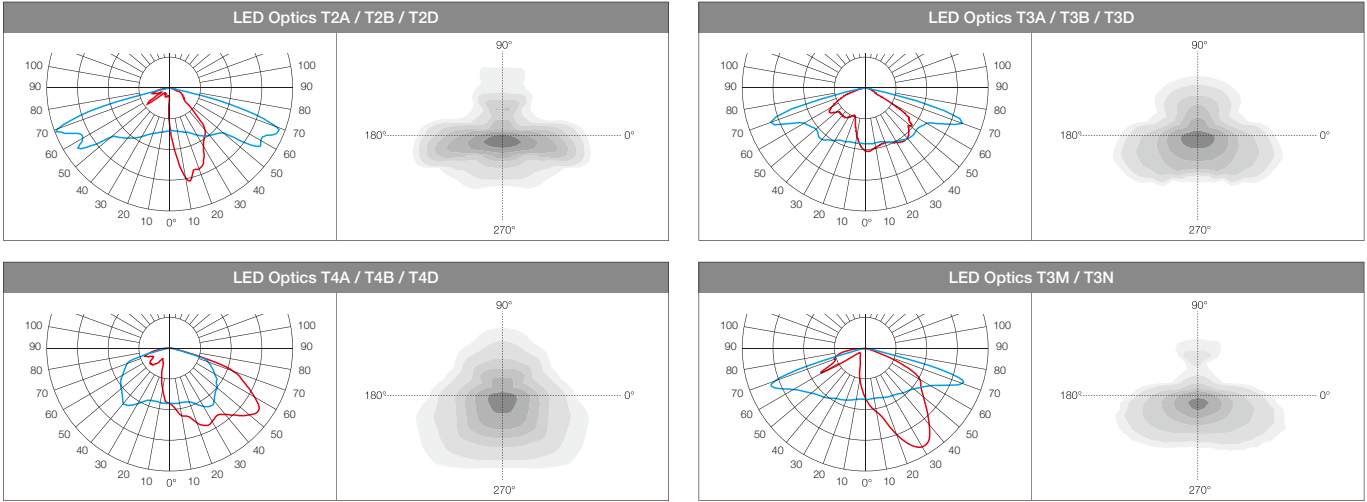

技术参数 Technology data



D-221S

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-221SLED40-16	40W	16	T2A/T3A/T4A/T2M/T3M	500*370*135	6.2	1170	2465
D-221SLED40-32	40W	32	T2A/T3A/T4A/T2M/T3M	500*370*135	6.2	1170	2465
D-221SLED60-32	60W	32	T2A/T3A/T4A/T2M/T3M	500*370*135	6.2	1170	2465
D-221SLED75-32	75W	32	T2A/T3A/T4A/T2M/T3M	500*370*135	6.2	1170	2465

D-221SA

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
D-221SALED40-12	40W	12	T2A/T3A/T4A/T2M/T3M	500*370*135	6.6	884	1833
D-221SALED40-24	40W	24	T2A/T3A/T4A/T2M/T3M	500*370*135	6.6	884	1833
D-221SALED60-24	60W	24	T2A/T3A/T4A/T2M/T3M	500*370*135	6.6	884	1833
D-221SALED75-24	75W	24	T2A/T3A/T4A/T2M/T3M	500*370*135	6.6	884	1833

可选配件 Accessories options

Code		
	横装转接头 Side-adptor	250000436
	壁装底座 Wall bracket	210004479