



D-251 Series




D-251L
200-240W

D-251M
120-180W


D-251S
75-100W

D-251S1
25-60W

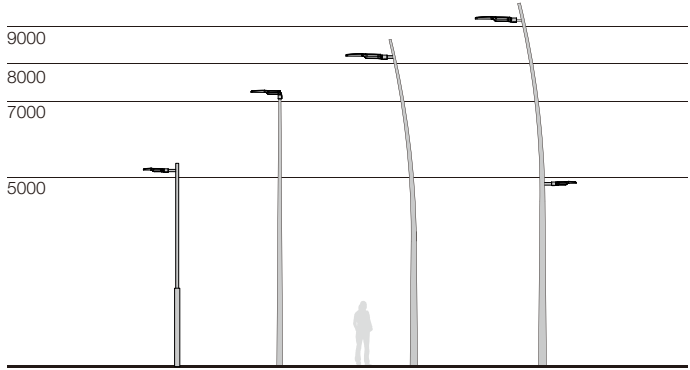



安装座有Ø60 / Ø48 / Ø75mm供选择
The mounting seat is available in Ø60 / Ø48 / Ø75mm

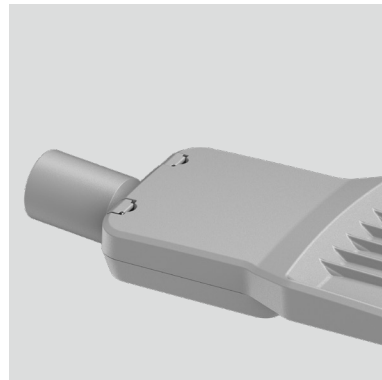

简洁的外形设计，免工具开启设计
Simple shape design, tool-free opening design.



D-251 Series


一组经济型LED路灯，功能齐全，造型简洁大方，从平凡中体现不平凡的设计理念。灯具功率范围从25W-240W。

A group of economic LED street lighting, with full complete functions and simple and generous modeling, reflects the extraordinary design concept from the ordinary. The lamp power range is from 25W to 240W.



灯具具有横装、竖装二种方式，角度可以-10°~+10°调节

Top or side fitting from -10° ~ +10° angle adjustable.

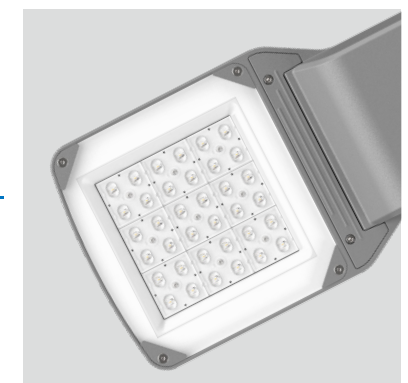

每款尺寸灯具都配有钢化玻璃防护罩设计配置，IK08防护等级

Each type luminaire has equipped with tempered glass protective cover design configuration, IK08 protection level.


简述 Description



- 铝压铸灯体外壳，超白钢化玻璃
- 高透光透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0~10V / DALI / 编程电源选择，20KV浪涌保护器
- 免工具开启设计，设有开启断电保护器
- 有侧装和顶装2种安装方式，角度可调，安装管径有Ø48 / Ø60 / Ø76mm
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系統可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass.
- Optics lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- Tool-free replaceable, automatic on/off connector when be open.
- Top and side fixing, angle can be adjustable, installation tube diameter Ø48/Ø60/Ø76mm.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.


应用透镜 Optics application

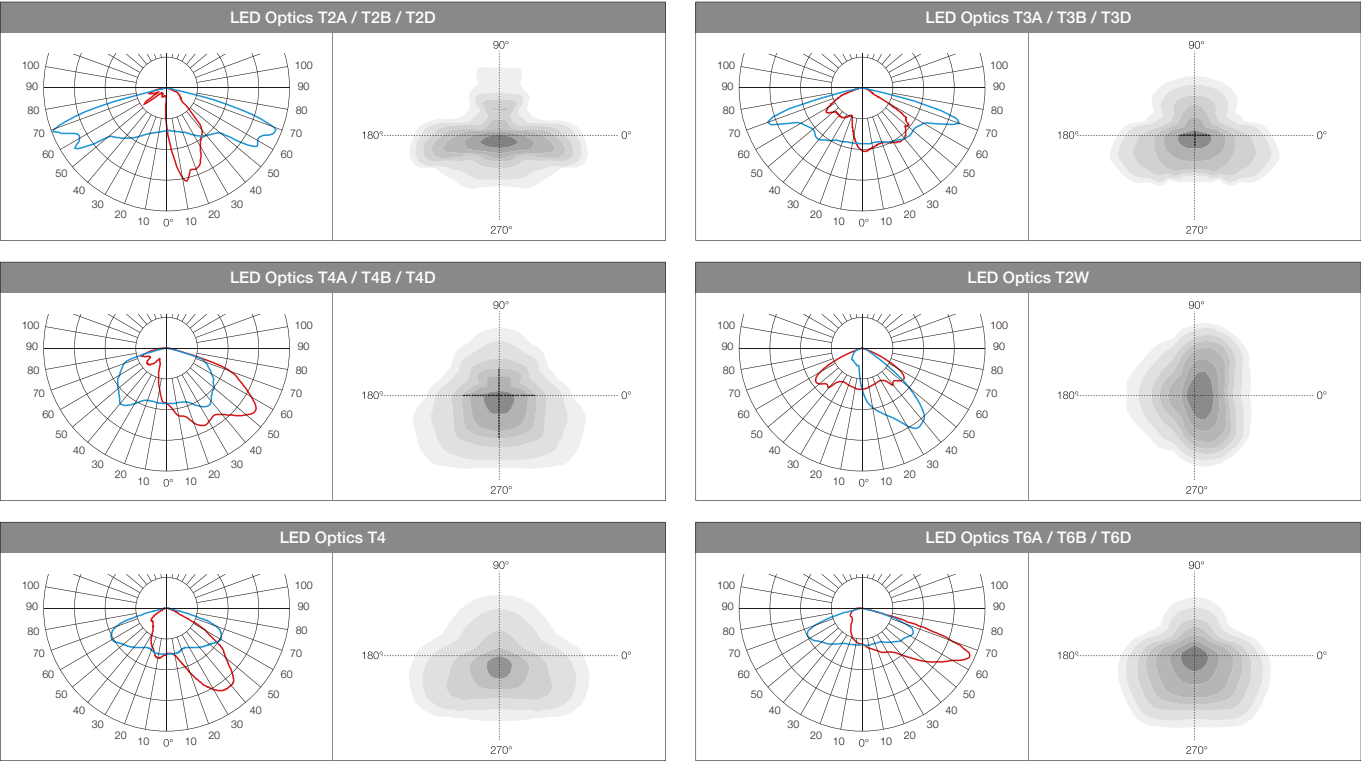

技术参数 Technology data


D-251L

Code	Power	LED Qty	Optics	Packing Size
LED chips - 5050				
D-251LLED200-96	200W	96	T2D/T3D/T4D	755*320*130
D-251LLED240-96	240W	96	T2D/T3D/T4D	755*320*130




D-251M

Code	Power	LED Qty	Optics	Packing Size
LED chips - 5050				
D-251MLED120-72	120W	72	T2D/T3D/T4D	668*295*130
D-251MLED150-72	150W	72	T2D/T3D/T4D	668*295*130
D-251MLED180-72	180W	72	T2D/T3D/T4D	668*295*130



D-251S

Code	Power	LED Qty	Optics	Packing Size
LED chips - 5050				
D-251SLED75-36	75W	36	T2D/T3D/T4D	638*250*130
D-251SLED100-54	100W	54	T2D/T3D/T4D	638*250*130



D-251S1

Code	Power	LED Qty	Optics	Packing Size
LED chips - 5050				
D-251S1LED25-16	25W	16	T2A/T3A/T4A/T2W/T4	548*200*125
D-251S1LED40-16	40W	16	T2D/T3D/T4D	548*200*125
D-251S1LED60-24	60W	24	T2D/T3D/T4D	548*200*125

