




T-251 Series



T-251A
40-60W

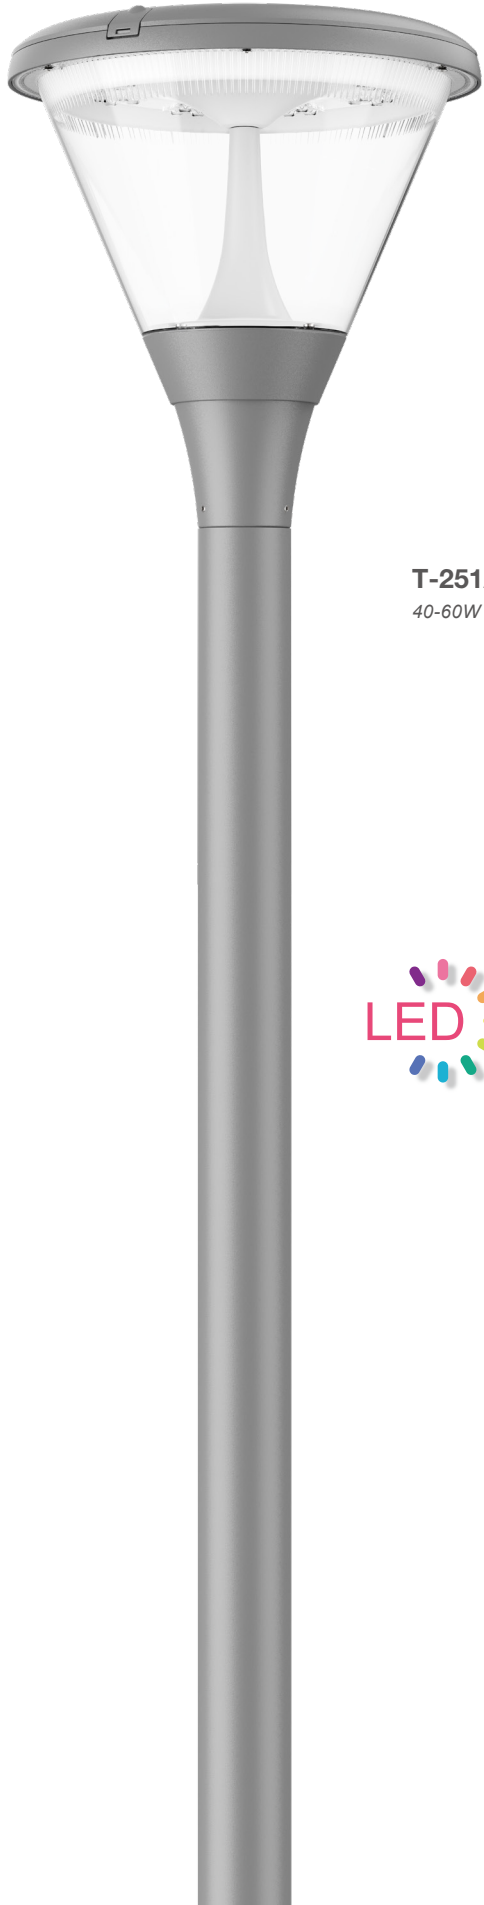


T-251W
40-60W



突发的灵感，整体的构思，借助于设计师专业的对光应用的智慧，造就了本系列LED庭院灯具的传奇。将光的舒适性和光亮度的技术融合，全都诠释在该系列灯具之中。

The sudden inspiration, overall idea, with the help of the designer's professional wisdom of light application, has created the legend of this series of LED courtyard lighting. From the light comfort and brightness of different understanding, all interpretation in it.

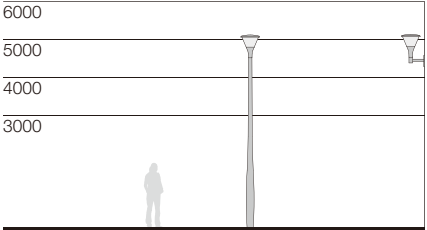




无需工具，可直接打开扣攀
Open the button without tools



轻松打开上盖，方便安装和维护
Easily open the top cover for easy installation and maintenance

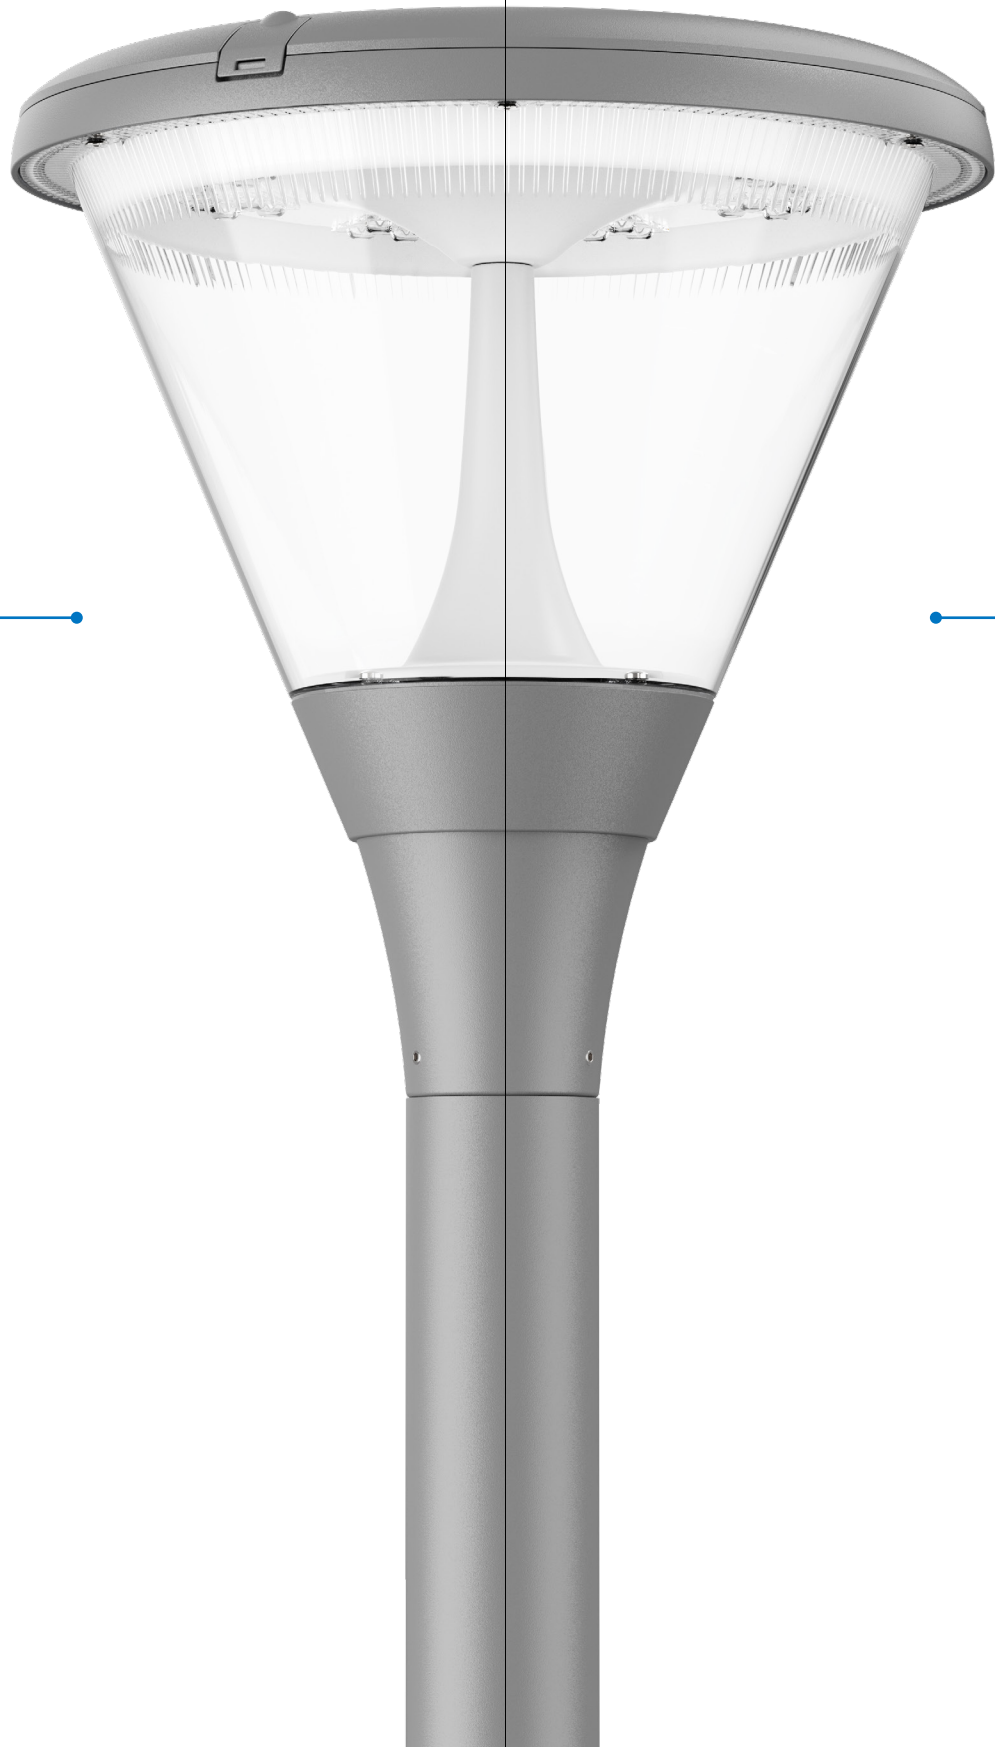

光线直接从上面向下照明 —— 光效更高
Light goes straight down from upper
Higher light efficiency



高透光PC透镜，更好的视觉舒适性
High transmittance PC lens for better visual comfort


简述 Description




- 铝压铸灯体外壳，超白钢化玻璃
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0~10V / DALI / 编程电源选择，20KV浪涌保护器
- 有多种安装支架供选择搭配，形成多款不同外形灯具，安装管径有Ø60 / Ø76mm
- 根据不同客户对光的需要，有光直射和间接反射供选择
- 防紫外线聚氨酯塑粉喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质

- Die-casting aluminium body, super white tempered glass. Anti aging PC plastic diffuser.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed be options, and with surge protection up to 20KV.
- There are a variety of mounting brackets options, form of different shapes of lightng, installation tube diameter Ø60/Ø76mm.
- There are direct light and indirect reflection to options for different clients demand.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.


应用透镜 Optics application

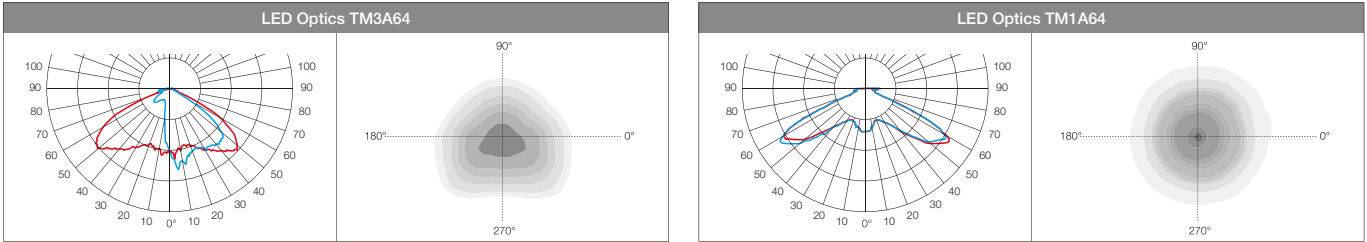

技术参数 Technology data



T-251A							
Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 2835							
T-251ALED40-128	40W	128	TM3A64/TM1A64	510*510*580	9.0	176	368
T-251ALED60-128	60W	128	TM3A64/TM1A64	510*510*580	9.0	176	368



T-251W							
Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 2835							
T-251W1LED40-128	40W	128	TM3A64/TM1A64	510*510*580	9.0	176	368
T-251W1LED60-128	60W	128	TM3A64/TM1A64	510*510*580	9.0	176	368

可选配件 Accessories options

Code		
	Ø60-76转接头	Pole reducer
	Required for install on the pole.	
	壁装支架	Wall bracket
		220001236