






T-151

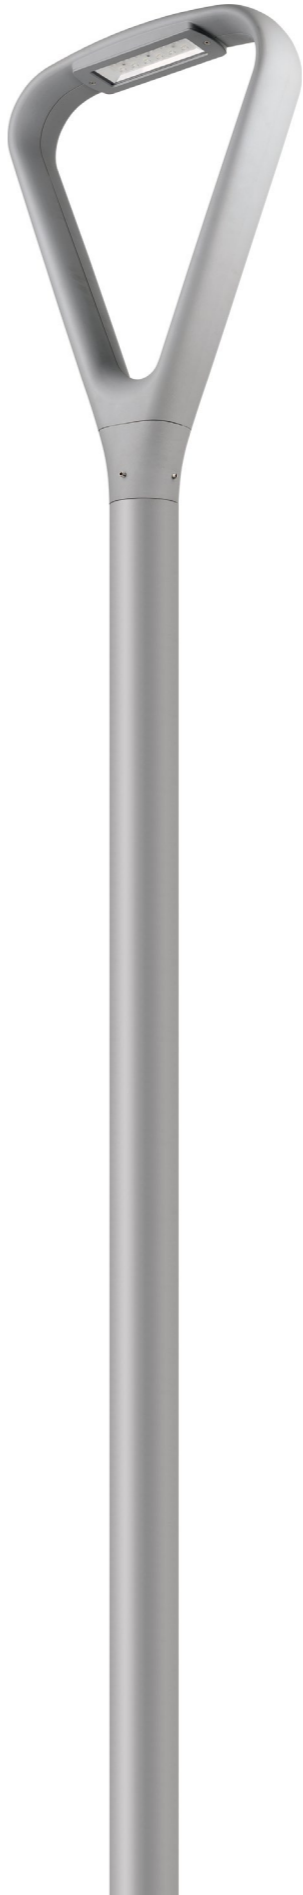


T-151  
30-60W



一款极具现代感设计的异形LED庭院灯具，  
流线的外形，独特的设计构思，彰显设计者  
的独具匠心，灯具功率30W-60W。

A modern design of special-shaped led courtyard  
lamps, streamline shape, unique design concept,  
highlight the designer's ingenuity, lamp power  
30W-60W.

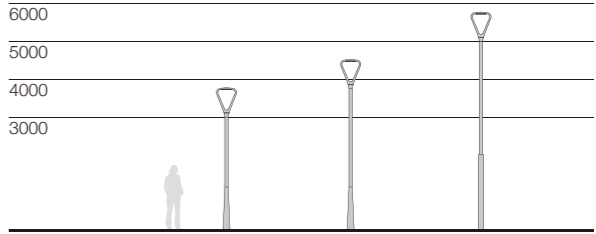

简述 Description




- 铝压铸灯体外壳，超白钢化玻璃，白色PC反射罩
- 高透光PC透镜，具有高视觉舒适性和均匀配光透镜，供多种不同配光选择
- 高性能LED芯片，驱动有0-10V / DALI / 编程电源选择，20KV浪涌保护器
- 灯具采用LED模组，模块式电器部件，安装更换方便
- 防紫外线聚氨酯粉末喷涂表面，盐雾测试可以达1000小时以上
- 无生物蓝光危害风险，符合EN62471: 2008标准
- 道路灯智能远程控制系统可选，可以与远程管理系统兼容
- 所有外部螺钉均为304不锈钢材质



MD-04 LED Module

- Die-casting aluminium body, super white tempered glass, PC white plastic reflector.
- Optics with PC lens with high visual comfortable and uniform lighting distribution, multiple light distribution options.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- LED module is used inside, Integrated electrical components which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

应用透镜 Optics application

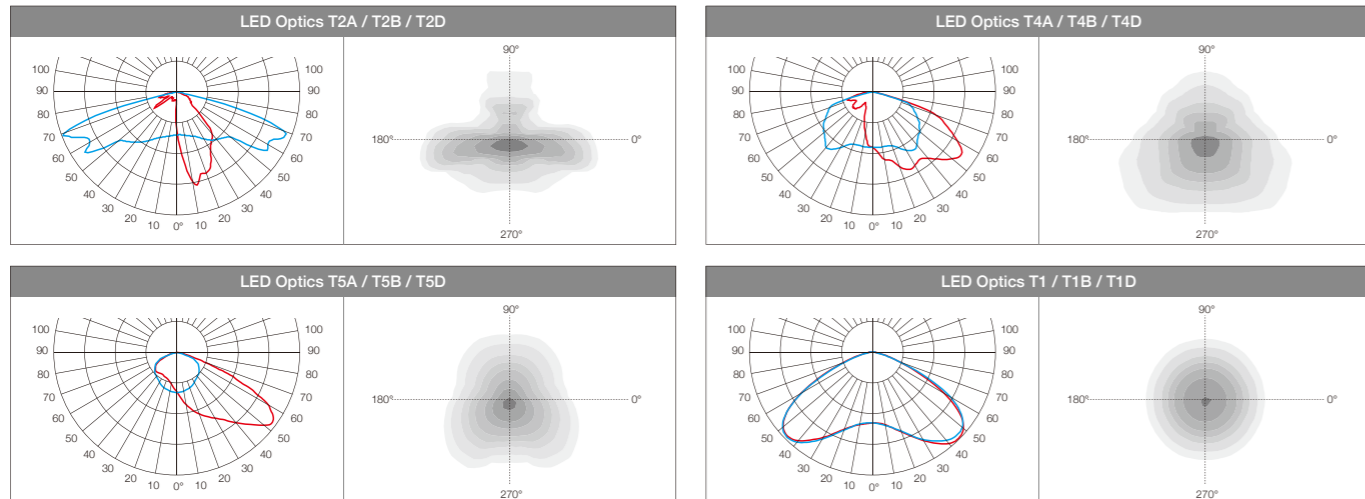


技术参数 Technology data



T-151

Code	Power	LED Qty	Optics	Packing Size	Weight	Pcs/20"	Pcs/40"
LED chips - 3535/5050							
T-151LED30-12	30W	12	T2A/T3A/T4A/T3M/T4	810*520*145	8.5	435	885
T-151LED40-18	40W	18	T1D/T3D/T4D	810*520*145	8.5	435	885
T-151LED60-18	60W	18	T1D/T3D/T4D	810*520*145	8.5	435	885



独立防水电器部件  
Independent waterproof electrical components.

可选配件 Accessories options

	Code
防水连接器 IP68 Connector	32000047
Ø76-60转换套 Adapter Arm / Adapter required for install on the pole.	210001154